

## Evaluate the Efficiency of Ashes from Palm and Pistachio Wastes in Removal of Reactive Red 120 Dye from Aqueous Solutions

<sup>1</sup>Mohammad Reza Narooie, <sup>2</sup>Somayeh Rahdar, <sup>3</sup>Hamed Biglari, <sup>4</sup>Mohammad Mehdi Baneshi, <sup>5</sup>Morteza Ahamadabadi, <sup>6</sup>Mehdi Saeidi, <sup>7</sup>Arsalan Salimi, <sup>8</sup>Razieh Khaksefidi and <sup>9</sup>Vali Alipour

<sup>1</sup>Department of Environmental Health Engineering, School of Public Health, Iranshahr University of Medical Sciences, Iranshahr, Iran

<sup>2</sup>Department of Environmental Health Engineering, School of Public Health, Zabol University of Medical Sciences, Zabol, Iran

<sup>3</sup>Department of Environmental Health Engineering, School of Public Health, Social Development and Health Promotion Research Center, Gonabad University of Medical Sciences, Gonabad, Iran

<sup>4</sup>Social Determinants of Health Research Center, Yasuj University of Medical Science, Yasuj, Iran

<sup>5</sup>Department of Environmental Health Engineering, Torbat Jam Faculty of Medical Sciences, Torbat Jam, Iran

<sup>6</sup>Department of Environmental Health Engineering School of Health, Torbat Heydariyeh University of Medical Sciences, Torbat Heydariyeh, Iran

<sup>7</sup>Research Center for Environmental Determinants of Health, Kermanshah University of Medical Sciences, Kermanshah, Iran

<sup>8</sup>Department of Environmental Health Engineering, School of Public Health, Zahedan University of Medical Science, Zahedan, Iran

<sup>9</sup>Department of Environmental Health Engineering, School of Public Health, Research Center for Social Determinants in Health Promotion, Hormozgan University of Medical Sciences, Bandar Abbas, Iran

---

**Abstract:** Many industrial wastewaters contain toxic and carcinogenic dyes. Health and environmental problems will occur by discharging such wastewaters into the environment. This study was conducted to evaluate the efficiency of ashes from palm and pistachio wastes in removal of reactive red 120 dye from aqueous solutions. In order to perform this experimental study, initially synthetic wastewater was prepared at a concentration of 20 mg L<sup>-1</sup>. Then the effects of variables of ashes obtained from palm and pistachio wastes were assessed at 30, 60, 90, 120, 150 and 180 min and pH of 3, 5, 7, 9 and 11 on the removal efficiency of dye by adsorption method. The dye concentration in various samples was measured using a spectrophotometer at a wavelength of 525 nm. The levels of dye removal at pH 3-11 for the dye concentration of 20 and 0.05 g L<sup>-1</sup> palm ash absorbent in mentioned time were respectively 75.5, 79.4, 84.4, 89.3, 91.3 and 92.8% as well as for pistachio ash absorbent in mentioned time were respectively 84, 88.2, 91.6, 92.2, 93.7 and 94.6% adsorption isotherm for the both absorbents was compatible with Langmuir Model (R<sup>2</sup> 0.876 for pistachio ash and R<sup>2</sup> 0.980 for palm ash). The dye removal value enhanced with increasing reaction time. The highest efficiency for the palm ash and pistachio ash was at acidic and neutral pH, respectively. The use of palm ash in removal of reactive red 120 dye is efficient and cost-effective.

**Key words:** Palm ash, pistachio hull, textile wastewater, red 120 dye, adsorption, isotherm

---

### INTRODUCTION

Industrial effluents such as leather, tanning, resins, plastics, paper, food and cosmetics are some of the most important sources of dye wastewater. Textile industry is

another important source to produce strong dye wastewaters with a concentration of 10-200 mg L<sup>-1</sup> (Celekli *et al.*, 2009; Bazrafshan *et al.*, 2012a, b; Biglari *et al.*, 2016a-d). These wastewaters contain a variety of sustainable synthetic dyes that are often toxic

---

**Corresponding Author:** Hamed Biglari, Department of Environmental Health Engineering, School of Public Health, Social Development and Health Promotion Research Center, Gonabad University of Medical Sciences, Gonabad, Iran

and even carcinogen considered as a serious risk to aquatic organisms and human health. Discharge the wastewaters into the environment cause health, aesthetic and environmental problems (Moussavi and Mahmoudi, 2009). Entering dye wastewaters into the receptive water resources prevents sunlight transmission to aquatic environments, reduces photosynthesis and disrupts biological processes (Alver and Metin, 2012). Currently, about one hundred thousand different types of pollution such as commercial dyes are produced around the world with production of over 700000 tons per year (Mahmoodi *et al.*, 2012; Yilmaz *et al.*, 2011; Biglari *et al.*, 2012a, b; Mohammadi *et al.*, 2015; Mirzabeygi *et al.*, 2016; Ozdemir *et al.*, 2009; Sajjadi *et al.*, 2016). Among the existing dye, reactive Azo dyes comprise about 60-70% of dyes used in the dyeing process which about 10-50% of them enter the effluents due to relatively low consolidation efficiency compared with other dyes (Yu *et al.*, 2010; Kyzas *et al.*, 2012). Reactive dyes are toxic, mutagen and resistant to biological treatment. Depletion of these dyes into the ecosystem can cause high environmental risks (Kyzas *et al.*, 2012). The dyes are soluble in water, resistant to light and chemical agents and are not removed easily by common methods of treatment (Engin *et al.*, 2008; Gok *et al.*, 2010). Therefore, the management of wastewaters containing reactive dye is very important. There are several methods to dye removal from wastewater such as adsorption, biodegradation, coagulation, chemical oxidation, electrochemical processes, filtration and reverse osmosis (Yu *et al.*, 2010; Han *et al.*, 2010; Santhi *et al.*, 2010; Alipour *et al.*, 2014). Adsorption is one of the effective ways in dye removal from textile wastewater using numerous adsorbent such as activated carbon, sawdust, oat bran, rice hull, chitosan and eggshell (Ghaneian *et al.*, 2010; Khorramfar *et al.*, 2009). Activated carbon, in this regard is one of the most widely used adsorbents to control environmental pollution. However, due to high cost of production, restoration and treatment, researches have been focused on alternative adsorbents with low cost and high absorption capacity (Ghaneian *et al.*, 2010; Alizadeh and Borghei, 2006; Ghanizadeh and Asgari, 2009). Therefore, the current study was aimed to assess the efficacy of ashes obtained from palm tree and pistachio hull in reactive red 120 dye removal from aqueous solutions.

## MATERIALS AND METHODS

In this descriptive and analytical research, all tests were evaluated experimentally in a batch reactor by applying study variables on reactive red 120 dye absorption process using palm and pistachio hull ashes. The required samples in this study were prepared

synthetically. In addition, the ashes derived from palm tree and pistachio hull wastes were prepared in laboratory conditions using an electric furnace at 600°C for 2 h. To do the experiments, the stock solution of reactive red 120 dye was prepared with a concentration of 1000 mg L<sup>-1</sup> and exposed to certain amount of palm and pistachio hull ashes with concentrations of 0.01, 0.02, 0.03, 0.04 and 0.05 mg L<sup>-1</sup>, pH of 3, 5, 7, 9 and 11 and contact times of 30, 60, 90, 120, 150 and 180 min. To establish better contact between the pollutant and adsorbent, the samples were placed on a magnetic stirrer. Finally, solutions containing adsorbent were passed through the filter study 0.45 µm. The final concentration of dye in solution was measured by spectrophotometer at a wavelength of 525 (Gholami *et al.*, 2013). Langmuir and Freundlich isotherms were used to determine the adsorption isotherm.

## RESULTS AND DISCUSSION

The results of dye removal from textile wastewater by palm and pistachio ashes with initial dye concentration of 20 mg L<sup>-1</sup>, adsorbent concentration of 0.01 g L<sup>-1</sup> and contact time of 60 min have been presented in Fig. 1. As can be seen, the optimal pH for the dye removal from textile wastewater was 5 for pistachio ash and 7 for palm ash. The solution pH is considered one of the most important factors influencing chemical and biological reactions of wastewater (Khorramfar *et al.*, 2009; Ghanizadeh and Asgari, 2009; Naddafi and Gholami, 2014). According to Fig. 1, the percentage of dye removal using pistachio ash adsorbent at pH 3-5 increased by 8% with increasing pH from 5-11, dye removal efficiency showed about 18% reduction. The percentage of dye removal using palm ash adsorbent at pH 3-7 elevated up to about 8% and dye removal efficiency decreased by about 9% with increased pH from 7-11. In a study of Kusvuran *et al.* (2004) that was conducted to compare several advanced oxidation process to remove reactive red 120 dye in aqueous solution, the optimal pH was acidic.

The effect of adsorbent dosage in dye removal from textile wastewater in dye concentration of 20 mg L<sup>-1</sup> and contact time of 60 min and pH 7 are shown in Fig. 2. The optimal dosage of pistachio ash adsorbent was 0.04 g L<sup>-1</sup> and the optimal dosage of palm ash adsorbent was 0.05 g L<sup>-1</sup>. In adsorption studies, determine the appropriate adsorbent dosage is one of the most important issues that should be considered. Figure 2 shows the effect of initial adsorbent concentration in dye removal by palm and pistachio ashes. According to the figure, the dye removal percentage enhanced with increasing palm ash adsorbent dosage so that dye removal was 76% at a concentration of 0.01 g L<sup>-1</sup> and

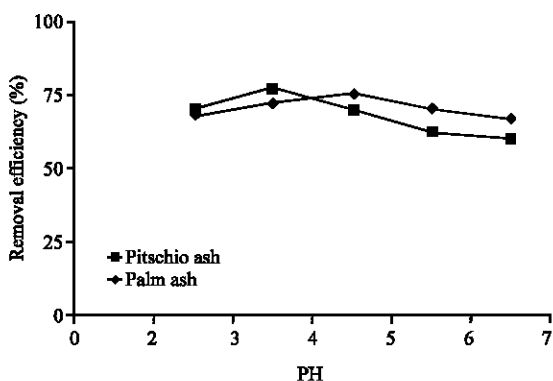


Fig. 1: The effect of PH on the removal of reactive red 120 dye by palm and pistachio ash (initial concentration dye 20 mg L<sup>-1</sup>, contact time 60 min, adsorbent dosage 0.01 g L<sup>-1</sup>)

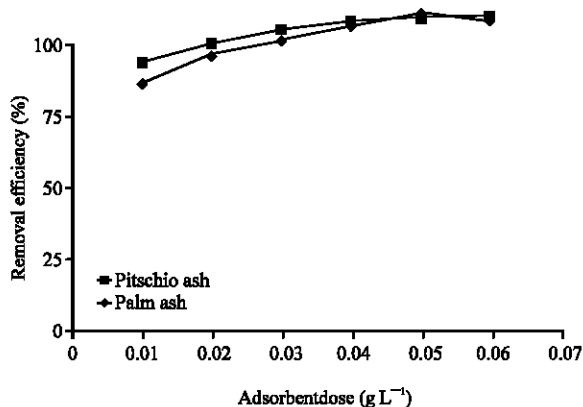


Fig. 2: The effect of adsorbent dose (g L<sup>-1</sup>) on the removal of reactive red 120 dye by palm and pistachio ash (initial concentration dye 20 mg L<sup>-1</sup>, contact time 60 min, pH 7)

rose to over 95% at a concentration of 0.04 g L<sup>-1</sup>. Initial adsorbent concentration effect on dye removal by the pistachio ash showed 83% dye removal at the concentration of 0.01 g L<sup>-1</sup> and over 96% increase at the concentration of 0.05 g L<sup>-1</sup>. The increase in absorption could be due to great adsorbent surface and more accessible to adsorption sites (Khorramfar *et al.*, 2009; Ghanizadeh and Asgari, 2009; Nateghi *et al.*, 2010). In this study, the optimum concentration of adsorbent was 0.05 g L<sup>-1</sup>. Gholami *et al.* (2013) during a study on the capacity of orange peel ash in direct black 22 dye removal from aqueous environments showed that the removal rate improved from 22-87% with increasing adsorbent dosage from 0.5-2 g L<sup>-1</sup> (Gholami *et al.*, 2013).

The levels of dye removal at different times using palm and pistachio ashes with dye concentration of

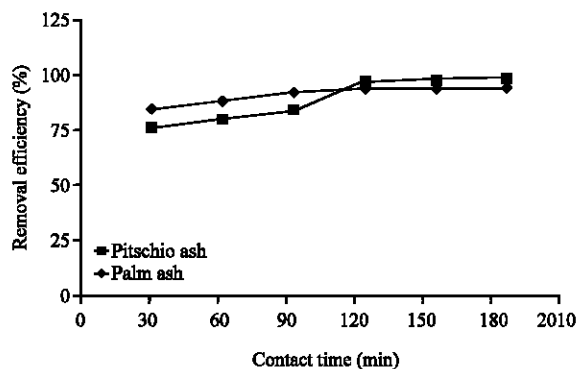


Fig. 3: The effect of contact time (min) on the removal of reactive red 120 dye by palm and pistachio ash (initial concentration dye 20 mg L<sup>-1</sup>, adsorbent dosage 0.05 g L<sup>-1</sup>, pH = 7)

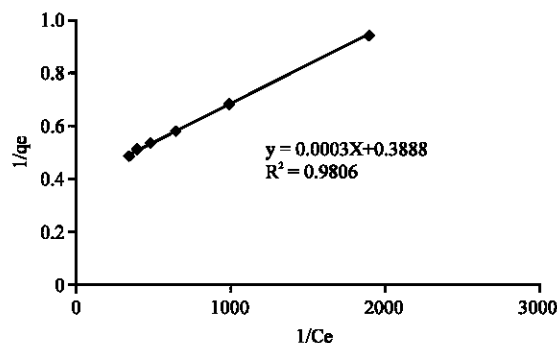


Fig. 4: The palm ash Langmuir isotherms model

20 mg L<sup>-1</sup>, adsorbent dosage of 0.05 g L<sup>-1</sup> and pH = 7 are shown in Fig. 3. In the present study, over 75% of dye removal by pistachio ashes was done at the first 30 min and 97% dye removal in 120 min. After that, the increase in the removal was very partial to reach a constant value. The results of contact time effect on dye removal by palm ash revealed that over 85% of dye was removed in the first 30 min and 93.5% in 120 min and then came to equilibrium. Comparison of efficacy in these adsorbents indicated that both of them reached to equilibrium in 120 min. The pistachio ash removed over 75% of dye in the first 30 min while palm ash removed over 85% of dye. As can be seen, the proper equilibrium time for both types of adsorbent was 120 min. By rise of contact time, due to increased collisions between dye and adsorbent molecules, adsorption will be greater. The adsorption process enhances with the passage of contact time to reach the equilibrium status. According to Fig. 3, contact time is an important variable in the adsorption process. Dye removal efficiency using adsorbent has a direct relationship with contact time. During the adsorption process, the adsorbent surface is blocked by adsorbate

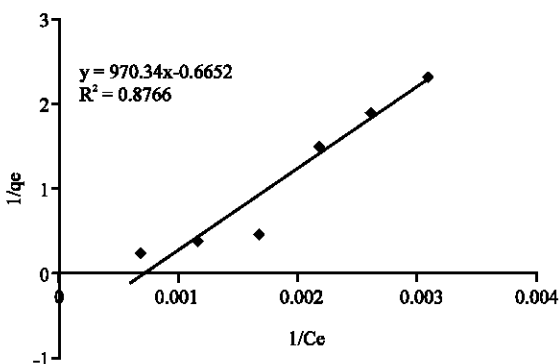


Fig. 5: The pistachio ash Langmuir isotherms model

molecules and can be covered after a period. When this happens, absorbent cannot absorb more dye molecules.

Langmuir isotherms of absorbent concentration effect on dye removal at different concentrations of pistachio and palm ashes are shown in Fig. 4 and 5. Determination of adsorption isotherms of pollutants by different absorbents is an important parameter in the adsorption studies. Adsorption isotherms are adsorption properties and equilibrium data which describe how pollutants to react with absorbent and have key role in optimizing absorbent reagent. In the present study, evaluating the experimental data with the Langmuir and Freundlich Models as well as comparison of their correlation coefficients indicated that dye adsorbed on the palm and pistachio ashes follows the Langmuir isotherm. Due to the higher correlation coefficient in Langmuir Model, dye adsorbed on palm ash had more compliant with the Langmuir Model; accordingly, dye absorption takes place as monolayer on homogeneous surface. Ghaneian *et al.* (2010) used the eggshell as natural absorbent in reactive red 123 dye removal from synthetic textile wastewater and reported that reactive red 123 dye removal follows the Langmuir isotherm. Absalan *et al.* (2011) in reactive red 120 dye removal by  $\text{Fe}_3\text{O}_4$  magnetic nanoparticles found that dye removal follows the Langmuir Model with correlation coefficient of 0.9946.

## CONCLUSION

The present study indicated that the pistachio and palm ashes could effectively remove dye from textile wastewaters. The percentage of dye removal has direct relationship with absorbent dosage and contact time. In this research, the optimal pH was 5 for Pistachio ash and 7 for palm ash. It seems that due to abundance of palm tree wastes in the study area, the use of palm ash requires minimum, affordable low-cost and highly efficient technology.

## REFERENCES

- Absalan, G., M. Asadi, S. Kamran, L. Sheikhan and D.M. Goltz, 2011. Removal of reactive red-120 and 4-(2-pyridylazo) resorcinol from aqueous samples by  $\text{Fe}_3\text{O}_4$  magnetic nanoparticles using ionic liquid as modifier. *J. Hazard. Mater.*, 192: 476-484.
- Alipour, V., S. Nasser, R.N. Nodehi, A.H. Mahvi and A. Rashidi, 2014. Preparation and application of oyster shell supported zero valent nano scale iron for removal of natural organic matter from aqueous solutions. *J. Environ. Health Sci. Eng.*, 12: 1-8.
- Alizadeh, R. and S.M. Borghei, 2006. The use of granular activated carbon to remove organic matter and biological carbon in the process of textile dye wastewater. *J. Chem. Chem. Eng.*, 25: 21-28.
- Alver, E. and A.U. Metin, 2012. Anionic dye removal from aqueous solutions using modified zeolite: Adsorption kinetics and isotherm studies. *Chem. Engin. J.*, 200-202: 59-67.
- Bazrafshan, E., H. Biglari and A.H. Mahvi, 2012a. Phenol removal by electrocoagulation process from aqueous solutions. *Fresenius Environ. Bull.*, 21: 364-371.
- Bazrafshan, E., H. Biglari and A.H. Mahvi, 2012b. Humic acid removal from aqueous environments by electrocoagulation process using iron electrodes. *J. Chem.*, 9: 2453-2461.
- Biglari, H., M. Saeidi, V. Alipour, S. Rahdar and Y. Sohrabi *et al.*, 2016a. Prospect of disinfection byproducts in water resources of Zabol. *Int. J. Pharm. Technol.*, 8: 17856-17865.
- Biglari, H., M. Saeidi, V. Alipour, S. Rahdar and Y. Sohrabi *et al.*, 2016b. Review on hydrochemical and health effects of it in Sistan and Baluchistan groundwater's, Iran. *Int. J. Pharm. Technol.*, 8: 17900-17920.
- Biglari, H., Y. Sohrabi, S.S. Charganeh, M. Dabirian and N. Javan, 2016c. Surveying the geographical distribution of aluminium concentration in groundwater resources of Sistan and Baluchistan, Iran. *Res. J. Med. Sci.*, 10: 351-354.
- Biglari, H., A. Chavoshani, N. Javan and M.A. Hossein, 2016d. Geochemical study of groundwater conditions with special emphasis on fluoride concentration, Iran. *Desalin. Water Treatment*, 57: 22392-22399.
- Celekli, A., M. Yavuzatmaca and H. Bozkurt, 2009. Kinetic and equilibrium studies on the adsorption of reactive red 120 from aqueous solution on *Spirogyra majuscula*. *Chem. Eng. J.*, 152: 139-145.
- Engin, A.B., O. Ozdemir, M. Turan and A.Z. Turan, 2008. Color removal from textile dyebath effluents in a zeolite fixed bed reactor: Determination of optimum process conditions using Taguchi method. *J. Hazard. Mater.*, 159: 348-353.

- Ghaneian, M.T., G. Ghanizadeh, M. Gholami and F. Ghaderinasab, 2010. Application of eggshell as a natural sorbent for the removal of reactive red 123 dye from synthetic textile wastewater. *Zahedan J. Res. Med. Sci.*, 11: 25-34.
- Ghanizadeh, G.H. and G.H. Asgari, 2009. Removal of methylene blue dye from synthetic wastewater with bone char. *Iran. J. Health Environ.*, 2: 104-113.
- Gholami, H., M. Gholami and A. Gholizadeh, 2013. Direct black 22 carbon potential of orange peel in removal from aqueous solutions. *J. North Khorasan Univ. Med. Sci.*, 4: 45-55.
- Gok, O., A.S. Ozcan and A. Ozcan, 2010. Adsorption behavior of a textile dye of Reactive Blue 19 from aqueous solutions onto modified bentonite. *Applied Surf. Sci.*, 256: 5439-5443.
- Han, R., Y. Wang, Q. Sun, L. Wang and J. Song *et al.*, 2010. Malachite green adsorption onto natural zeolite and reuse by microwave irradiation. *J. Hazard. Mater.*, 175: 1056-1061.
- Khorramfar, S., N.M. Mahmoodi, M. Arami and K. Gharanjig, 2009. Dye removal from colored textile wastewater using tamarindus indica hull: Adsorption isotherm and kinetics study. *J. Color Sci. Tech.*, 3: 81-88.
- Kusvuran, E., O. Gulnaz, S. Irmak, O.M. Atanur and H.I. Yavuz *et al.*, 2004. Comparison of several advanced oxidation processes for the decolorization of Reactive red 120 azo dye in aqueous solution. *J. Hazard. Mater.*, 109: 85-93.
- Kyzas, G.Z., N.K. Lazaridis and A.C. Mitropoulos, 2012. Removal of dyes from aqueous solutions with untreated coffee residues as potential low-cost adsorbents: Equilibrium, reuse and thermodynamic approach. *Chem. Eng. J.*, 189-190: 148-159.
- Mahmoodi, N.M., B. Hayati and M. Arami, 2012. Kinetic, equilibrium and thermodynamic studies of ternary system dye removal using a biopolymer. *Ind. Crops Prod.*, 35: 295-301.
- Mirzabeygi, M., M. Naji, N. Yousefi, M. Shams and H. Biglari *et al.*, 2016. Evaluation of corrosion and scaling tendency indices in water distribution system: A case study of Torbat Heydariye, Iran. *Desalin. Water Treatment*, 57: 25918-25926.
- Mohammadi, S., E. Zamani, Z. Mohadeth, F. Mogtahedi and H. Chopan *et al.*, 2015. Effects of different doses of simvastatin on lead-induced kidney damage in Balb-C male mice. *Pharm. Sci.*, 20: 157-162.
- Moussavi, G. and M. Mahmoudi, 2009. Removal of azo and anthraquinone reactive dyes from industrial wastewaters using MgO nanoparticles. *J. Hazard. Mater.*, 168: 806-812.
- Naddafi, K. and M. Gholami, 2014. Removal of reactive red 120 from aqueous solutions using surface modified natural zeolite. *Iran. J. Health Environ.*, 7: 277-288.
- Nateghi, G.R., R. Boniadi, A. Asadi and M.M. Amin, 2010. Nickel oxide nanoparticles application as an efficient adsorbent for dye removal from synthetic wastewater treatment. *Health Syst. Res.*, 6: 1015-1021.
- Ozdemir, O., M. Turan, A.Z. Turan, A. Faki and A.B. Engin, 2009. Feasibility analysis of color removal from textile dyeing wastewater in a fixed-bed column system by Surfactant-Modified Zeolite (SMZ). *J. Hazard. Mater.*, 166: 647-654.
- Sajjadi, S.A., G. Asgari, H. Biglari and A. Chavoshani, 2016. Pentachlorophenol removal by persulfate and microwave processes coupled from aqueous environments. *J. Eng. Appl. Sci.*, 11: 1058-1064.
- Santhi, T., S. Manonmani and T. Smitha, 2010. Removal of methyl red from aqueous solution by activated carbon prepared from the Annona squamosa seed by adsorption. *Chem. Eng. Res. Bull.*, 14: 11-18.
- Yilmaz, A.E., R. Boncukcuoglu, M. Kocakerim and I.H. Karakas, 2011. Waste utilization: The removal of textile dye (Bomplex Red CR-L) from aqueous solution on sludge waste from electrocoagulation as adsorbent. *Desalin.*, 277: 156-163.
- Yu, S., M. Liu, M. Ma, M. Qi and Z. Lu *et al.*, 2010. Impacts of membrane properties on reactive dye removal from dye-salt mixtures by asymmetric cellulose acetate and composite polyamide nanofiltration membranes. *J. Membr. Sci.*, 350: 83-91.