



Intelligent Throughput-Based Sleep Control Algorithm for the 5G Dense Heterogeneous Cellular Networks

Topside E. Mathonsi and Tshimangadzo M. Tshilongamulenzhe

Department of Information Technology, Tshwane University of Technology, Pretoria, South Africa

Key words: Fifth generation (5G), Heterogeneous cellular networks (HetNets), Throughput QoS requirements, Latency performance, Radio access network (RANs), Intelligent Throughput-based Sleep Control (ITSC) algorithm

Abstract: In the recent past, many mobile/telecom operators have seen a continuously growing demand for ubiquitous high-speed wireless access and an unprecedented increase in connected wireless devices. As a result, we have seen explosive growth in traffic volumes and a wide range of QoS requirements. The fifth-generation (5G) heterogeneous cellular networks (HetNets) have been developed by different mobile operators to achieve the growing mass data capacity and to reconnoiter the energy efficiency guaranteed trade-off between throughput QoS requirements and latency performance. However, existing energy efficiency algorithms do not satisfy the throughput QoS requirements such as reduced latency and packet loss, longer battery lifetime, reliability and high data rates with regards to the three components of energy consumption of the 5G radio access network (RANs) that dominate the overall mobile communication networks. In addition, real-time traffic types such as voice and video require high computational load at the terminal side which have an undesirable impact on energy/battery lifetime which further affects the throughput QoS performance such as reduced packet loss, longer battery lifetime, reliability and high data rates. As a result, this study proposed an Intelligent Throughput-based Sleep Control (ITSC) algorithm for throughput QoS and energy efficiency enhancement in 5G dense HetNets. In the proposed ITSC algorithm, a Deep Neural Network (DNN) was used to determine the cell capacity ratio for the Small Base Stations (SBSs). Hence, the SBSs cell capacity ratio was employed as decision criteria to put the SBSs into a sleep state. Furthermore, transferable payoff coalitional game theory was used in order to ensure real-time applications have a higher priority over non-real time applications. Numerous Network Simulator 2 (NS-2) results confirmed that the proposed ITSC algorithm

Corresponding Author:

Topside E. Mathonsi

Department of Information Technology, Tshwane University of Technology, Pretoria, South Africa

Page No.: 121-129

Volume: 20, Issue 4, 2021

ISSN: 1682-3915

Asian Journal of Information Technology

Copy Right: Medwell Publications

reduced packet loss and produced better QoS. Moreover, the ITSC algorithm provided a longer battery lifetime,

reliability and high data rates for real-time traffic. The network throughput was improved as a result.

INTRODUCTION

In the recent past, wireless technologies have been growing actively all around the world and it has demonstrated exceptional changes in the way mobile and wireless communication systems are used. Hence, many mobile/telecom operators have seen a continuously growing demand for ubiquitous high-speed wireless access and the rapid increase in connected wireless devices. As a result, we have seen a rapid growth in traffic volumes and a wide range of QoS requirements^[1-34].

Continually, the fifth-generation (5G) heterogeneous cellular networks (HetNets) have been developed by different telecom operators to achieve the growing mass data capacity and to reconnoiter the energy efficiency guaranteed trade-off between throughput QoS requirements and latency performance^[1-34].

It was predicted that by 2020, 5G HetNets will facilitate the connection of billions of wireless devices, i.e., wearable devices, sensors, drones and cars for our smart homes, smart cities, smart and safer vehicles, tele-surgery, advanced security, E-health and smart schools (Fig. 1). As a result, the 5G HetNets is providing a safer and more efficient place to live in the world as illustrated using Fig. 1^[1-34].

The connection of billions of wireless devices led to 5G dense HetNets as illustrated using Fig. 1. The 5G dense HetNets is made up of multiple radio base stations (RBSs)/small base stations (SBSs) to increase the coverage and system capacity which led to a high number of network elements. Hence, significantly increases of the power consumption and lessening the energy efficiency in downlink cellular networks. As a result, balancing the trade-off between energy efficiency, throughput QoS requirements and latency performance has been a challenging factor for many telecom operators and has emerged as a new key pillar/protuberant figure of merit. This is due to the environmental concerns and operational cost for these telecom operators.

Moreover, these three elements each contain two parts specifically, the dynamic power consumption part, which differs according to the network traffic load and the fixed power consumption part which is autonomous from the network traffic load. Continually, real-time traffic types such as voice and video require high computational load at the terminal side which have an undesirable impact on energy/battery lifetime which further affects the throughput QoS performance such as reduced packet loss, longer battery lifetime, reliability and high data rates^[1-34].

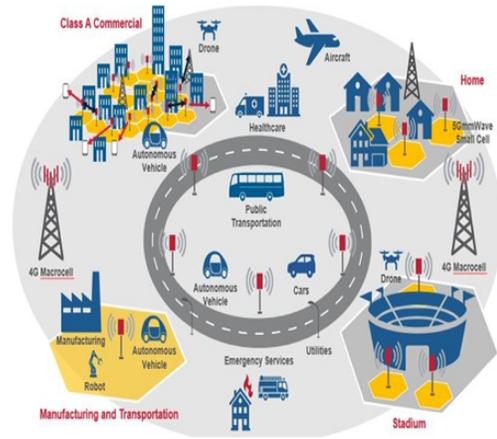


Fig. 1: A typical 5G connected community

Review of the literature has shown that energy efficient management algorithms have been proposed previously to address energy management in the 5G dense HetNets^[1-34]. However, these existing algorithms do not satisfy the throughput QoS requirements such as high data rates, reduced latency and reliability with regards to the three elements of energy consumption of the 5G Radio Access Network (RANs). The 5G RANs govern the overall mobile communication networks for all the telecom operators in the world. These 5G RANs elements include specifically, the power consumed in the Backhaul Network (BHN), the power consumed in the SBSs and that of the Radio Network Controller (RNC)^[1-34].

As a result, this paper proposed the Intelligent Throughput-based Sleep Control (ITSC) algorithm for balancing the trade-off between energy efficiency, throughput QoS requirements and latency performance in the 5G dense HetNets. In the proposed ITSC algorithm, a Deep Neural Network (DNN) is used to determine the cell capacity ratio for the SBSs. Hence, the SBSs cell capacity ratio was employed as decision criteria to put the SBSs into a sleep state. In addition, transferable payoff coalitional game theory was used in order to ensure real-time applications have a higher priority over non-real time applications. This was done in order to satisfy the throughput QoS requirements such as high data rates, reduced latency and packet loss and reliability in the 5G dense HetNets.

Literature review: The review of literature has shown that many researchers have developed many algorithms for energy efficiency for the 5G dense HetNets. In this section, we discuss these existing algorithms and their limitations.

Banerjee *et al.*^[12] proposed the use of the Energy Efficient Routing (EER) algorithm for Wireless Sensor Networks (WSNs) in order to prolong the battery lifetime of the sensor nodes. This technique defines the optimal size of clusters where data are aggregated properly and data routing occurs in an energy-efficient way. In the EER algorithm, clusters are generated with the help of the L-system Cellular Automata (CA) scheme. The data routing path is also decided by the L-system CA scheme. The simulation result showed that the life-time of the sensor nodes increased with respect to other existing energy conservation techniques. However, the EER algorithm failed to allocate higher bandwidth to real-time traffic which increased the number of packet loss and poor network throughput. The proposed ITSC algorithm reduced the number of packet losses by allocating higher bandwidth to real-time traffic using transferable payoff coalitional game theory.

Karimpour and Abad^[13] proposed the New Routing (NR) algorithm which was designed by improving on the LEACH routing protocol. The NR algorithm was designed for energy saving, energy efficiency and energy balancing in order to extend the service life of the WSNs. Several simulation results showed that the NR algorithm extended the service life of the WSNs. However, the NR algorithm didn't improve the network throughput. This is because the NR algorithm failed to reduce the number of packet loss for real-time applications. The proposed ITSC algorithm improves the network throughput by minimalizing the number of packet losses. In the proposed algorithm, transferable payoff coalitional game theory was used in order to ensure real-time applications have a higher priority over non-real time applications. This was done in order to satisfy the throughput QoS requirements such as high data rates, reduced packet loss and reliability in the 5G dense HetNets.

Zhang *et al.*^[14] proposed the sleep mode activation scheme for small cells by the core network, which activates the sleeping SBS with the smallest large-scale channel fading to the active user. This scheme used the advantage of the spatial correlation in large-scale fading and formulates the channel estimation method as a linear mean square. The result obtained in their paper showed the effectiveness of the channel estimation method to estimate large-scale fading and saves transmit power over small cell networks.

Soh *et al.*^[15] modeled sleeping strategy and apply the tool from stochastic geometry to analyze the impact of load-aware sleeping strategy for the homogeneous macro cell and heterogeneous networks. Based on the simulation results their model improved the lifetime of the homogeneous macro cell and heterogeneous networks.

Tang *et al.*^[21] proposed an energy efficient and reliable routing algorithm based on DSevide cetheory (DS-EERA). Firstly, their DS-EERA established three attribute indexes as the evidence under considering the

neighboring nodes' residual energy, traffic, the closeness of its path to the shortest path, etc. Then they adopted the entropy weight method to objectively determine the weight of three indexes. After establishing the Basic Probability Assignment (BPA) function, the fusion rule of DS evidence theory was applied to fuse the BPA function of each index value to select the next hop. Finally, each node in the network transmits data through this routing strategy. Simulation results showed that DS-EERA can effectively prolong the network lifetime.

However, the schemes proposed by Zhang *et al.*^[14], Bogale and Lee^[16] and Tang *et al.*^[21] could not improve the network throughput since their schemes experienced a high number of packet loss. This is because their schemes failed to allocate higher bandwidth to real-time traffic. The proposed ITSC algorithm used transferable payoff coalitional game theory to diminish packet loss in order to improve network throughput.

The review of the literature indicated that existing energy efficiency algorithms do not satisfy the throughput QoS requirements such as lessened latency and packet loss, reliability and high data rates. In the next section, we present the design of the proposed ITSC algorithm in order to solve the identified problem.

Design of The Intelligent Throughput-based Sleep Control (ITSC) algorithm:

The Intelligent Throughput-based Sleep Control (ITSC) algorithm was designed by using Deep Neural Network (DNN) to determine the cell capacity ratio for the SBSs. Hence, the SBSs cell capacity ratio was employed as decision criteria to put the SBSs into a sleep state. In addition, transferable payoff coalitional game theory was used in order to ensure real-time applications have a higher priority over non-real time applications. This was done in order to satisfy the throughput QoS requirements such as high data rates, reduced latency and packet loss, and reliability in the 5G dense HetNets (Fig. 2).

Deep neural network: DNN was used to calculate the cell capacity ratio for each SBSs. Different traffic types namely, real-time applications (i.e., voice traffic and video streaming) and non-real time applications (i.e., HTTP and E-mail) were used as input parameters to calculate the cell capacity ratio for each SBSs. We used a packet size of 84480 and 78022 bytes' online video conferencing and voice call for real-time applications. We further used an FTP packet size of 500 bytes for email services and 1000 bytes for HTTP services in the 5G dense HetNets (Fig. 3). The cell capacity ratio for each SBSs was calculated using Eq. 1:

$$CC_i = P_1 + P_2 + P_3 + P_n \quad (1)$$

Where:

CC_i = The cell capacity of each SBSs

P_1 = Traffic type



Fig. 2: A typical 5G dense HetNets

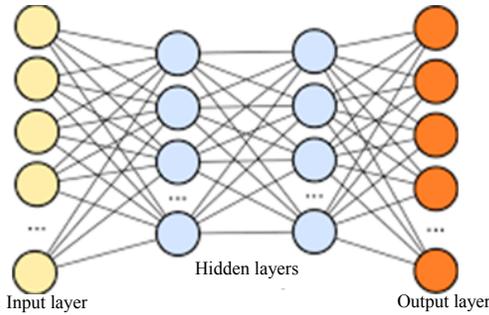


Fig. 3: Deep neural network architecture

After calculating the cell capacity of each SBSs and if the $CC_i = 0$ of any small base station (SBS), that SBS will go in a sleep state in order to save energy for each SBS. If the $CC_i = 0$, it means that there is no mobile node (MN) or user equipment (UE) that is connected to the SBS (Eq. 2):

$$SBS_j = 0 \quad (2)$$

While if $CC_i \neq 0$, it means that there are UE connected to that SBS (Eq. 3):

$$SBS_j = UE_1 + UE_2 + UE_3 + UE_n \quad (3)$$

Therefore, the energy efficiency (EE_i) is defined by the total cell capacity of each SBSs per total power consumption (PC_{total}) (Eq. 4):

$$EE_{SBS_j} = \frac{CC_1 + CC_2 + CC_3 + CC_n}{PC_{total}} \quad (4)$$

Transferable payoff coalitional game theory: A transferable payoff coalitional game theory is one of cooperative game theories. A cooperative game differs from non-cooperative game only in that binding agreement is possible before the start of the game. The

basic notions defining a cooperative game are the set of players, the action sets, and the payoffs. The value to a coalition is what it can achieve by coordinating their actions^[35].

A coalitional game used in this study, consists of a set of players $N = \{1, 2, \dots, N\}$ that can form cooperative groups known as coalitions who seek to form cooperative groups, in order to strengthen their positions in the game. Any coalition $S \subseteq N$ represents an agreement between the players in S to act as a single entity. To the player set N , the second fundamental concept of a coalitional game is the coalition value. Mainly, the coalition value, denoted by v , quantifies the worth of a coalition in a game. The definition of the coalition value determines the form and type of the game. However, independent of the definition of the value, a coalitional game is uniquely defined by the pair (N, v) . It must be noted that the coalition value (v) is, in many instances, referred to as the game, since, for every coalition value (v) a different game may be defined. Each coalition has a value which quantifies its worth in the game^[35].

A coalition value can be in three different forms: Characteristic form, Graph form and Partition form. In this paper our focus is on the characteristic form because a decision is made based on traffic type and the available resources, i.e., bandwidth in a network. In characteristic form, the coalition value of any coalition S belonging to N and the coalition value depend on the packet size a user wants to send at particular time and the available bandwidth. In addition, coalition value is the value which is assigned to a play after all players have communicated and made a decision based on the available bandwidth and the packet size a user wants to send at a particular time. The disadvantage of transferable payoff coalitional game theory is that it is difficult to apply it in a larger organization because competition is very high due to that a user makes decisions that benefit him/her only^[35].

Transferable payoff coalitional game theory was used in this paper in order to give real-time application higher priority over non-real time traffic. This was done in order to achieve high data rates, reduced latency and reliability for real-time applications in the 5G HetNets. For real-time traffic, we used a packet size of 84480 and 78022 bytes for online video conferencing and voice call (Eq. 5). For non-real-time traffic, we further used an FTP packet size of 500 bytes for email services and 1000 bytes for HTTP services (Eq. 5):

$$\begin{aligned} & \text{If } P_n \geq 78022 \\ & BW_H = \left[BW_{total} - \sum_i^N G_i^H \right] \\ & \text{else if } P_n \leq 500 \\ & BW_L = \left[\frac{BW_{total} - BW_H}{\sum_i^N R_i^M} \right] \end{aligned} \quad (5)$$

Intelligent Throughput-based Sleep Control (ITSC)

Algorithm: The proposed ITSC algorithm was designed by integrating DNN and transferable payoff coalitional game theory in order to satisfy the throughput QoS requirements such as high data rates, reduced latency and reliability in the 5G dense HetNets (Algorithm 1).

Algorithm 1; intelligent throughput-based sleep control algorithm:

```

Input
1. P1, P2, P3, Pn//Traffic types
2. UE1, UE2, UE3, UEn//user equipment
Process
3. while Pi ≠ 0
4. CCi = P1+P2, P3+, ..., Pn
5. while CCi = 0
6. SBj = UE1+UE2+UE3, ..., UEn
7. EESBj = CC1+CC2+CC3+, ..., CCn/PCtotal
8. if EESBj = 0
9. SBSj//will go to sleep state
10. else
11. SBSj//will remain active
12.
        If Pn ≥ 78022
        BWH = [BWtotal - ∑iN GiH]
        else if Pn ≤ 500
        BWL = [BWtotal - BWH / ∑iN RiM]
13. end else if
14. end if
Output
16. return BWH/BWL
15. end if
13. end while
14. end while
    
```

This study presented the design of the proposed ITSC algorithm in order to improve the network throughput and satisfy the throughput QoS requirements such as diminished packet loss, reliability and high data rates. In the next section, we present the evaluation of the proposed ITSC algorithm.

RESULTS AND DISCUSSION

In this study, we implemented the proposed ITSC algorithm using the IEEE 802.11ac model developed using NS-2 version 35. We ran NS-2 on Linux Ubuntu 14.04 operating system, 512 RAM, and 10 gigabytes of storage. In addition, we installed an LTE patch in order to set up LTE nodes and the LTE base stations. We further installed Ns2viop patch to allow nodes to send and receive voice/video packets. We used the Tool Command Language (TCL) script to simulate the network topology as given in Appendix B. In addition, since NS-2 uses C++

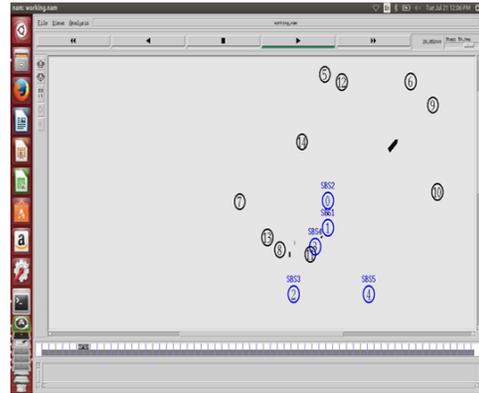


Fig. 4: NAM simulation scenario

to implement network algorithms, it was easier to implement DNN and transferable payoff coalitional game theory methods as a result. We configured a network topology of 500mX500m with five fixed located SBSs (labelled SBS1, SBS2, SBS3, SBS4 and SBS5) and 10 randomly located nodes (Fig. 4). We configured the simulation to start transmitting packets at 10 sec and stop transmitting at 100 sec.

In addition, we used the Ad-hoc On-Demand Distance Vector (AODV) routing protocol; this is because the AODV routing protocol enables dynamic, self-starting routing between MNs that are communicating. AODV creates routes only when they are needed which makes it easier to be implemented in the 5G HetNets. In addition, AODV supports both unicast and multicast routing packet transmissions. AODV builds routes between MNs when source nodes need to establish and maintain communication with other MNs on a wireless network. In addition, we used 802.11ac because it is a dual-band wireless technology and supports simultaneous connections on both the 2.4 and 5 GHz Wi-Fi bands. Furthermore, 802.11ac offers backward compatibility to 802.11b/g/n and bandwidth rated up to 1300 Mbps on the 5 GHz band plus up to 450 Mbps on 2.4 GHz. We provided all the simulation parameters using Table 1.

For the radio propagation model, we chose to use a two-ray-ground reflection model, since, it is more suitable for our computer simulation as it makes use of both the ground reflection and direct path for communication. Which for a small wireless network simulation is more realistic than using a free-space model which adds simulation time. We configured our MNs to use an omnidirectional antenna for both transmission and reception. For the processing and forwarding of packets, we used the Link Layer (LL). We further used Loss Monitor; a packet sink that checks for packet losses. In conclusion, the simulations were run for 100 sec and were done ten times in order to obtain the most convincing results.

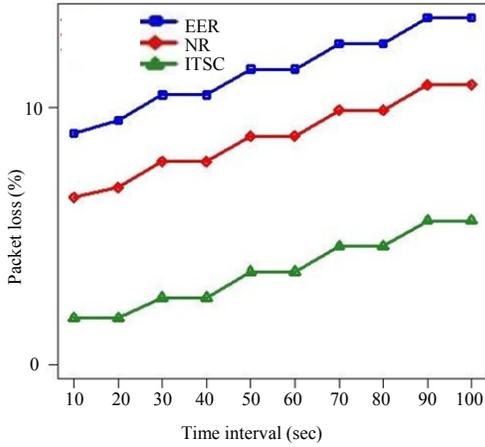


Fig. 5: Average packet loss

Table 1: Best simulation parameters

Parameters	Values
Routing protocol	AODV
MAC protocol	IEEE 802.11ac
Channel type	Wireless Channel
Network interface type	WirelessPhy
Propagation model	TwoRayGround
Antenna model	OmniAntenna
Queue type	Queue/DropTail/PriQueue
Link layer type	LL
Number of nodes	10
Max packets in IFQ	100
Mobility mode	Random way point
Bandwidth	50 Gbps for each SBS
Simulation area	500mX500m
Simulation time	100 sec
Agent trace	ON
Router trace	ON
Mac trace	OFF
Movement trace	ON

The proposed ITSC algorithm was compared with Energy Efficient Routing (EER) algorithm and New Routing (NR) algorithm. The EER algorithm uses a combination of Media Access Control (MAC) and routing protocol for energy efficiency. The NR algorithm optimizes energy efficiency by reducing the number and total transmissions distance in order to save energy.

Average packet loss: Packet loss occurs when one or more packets fails to reach its intended destination, during packet transmission. It is, therefore, important to minimize packet loss in order to ensure better QoS in the 5G dense HetNets.

The proposed ITSC algorithm, the NR algorithm and the EER algorithm have shown an average packet loss of 2.6, 6.4 and 7.7%, respectively (Fig. 5). The proposed ITSC algorithm outperformed the NR algorithm and the EER algorithm. Mainly because the ITSC algorithm allocated higher bandwidth to the real-time applications using transferable payoff coalitional game theory. Hence,

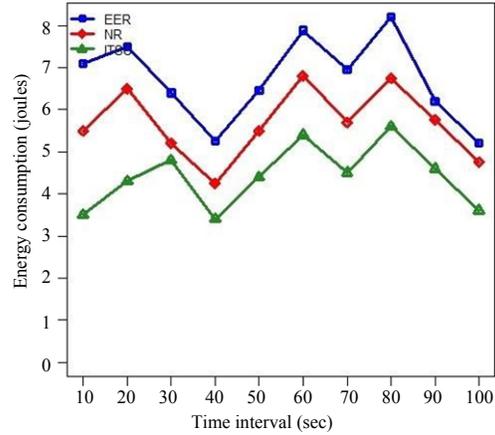


Fig. 6: Average energy consumption

reduced packet loss while the NR algorithm and the EER algorithm failed to allocate higher bandwidth for real-time traffic experienced higher packet loss as a result.

Average energy consumption: Energy consumption is defined as the measurement of the amount of energy consumed during data transmission in a network. Hence, it is important to minimize the energy consumed in order to ensure better network throughput in the 5G dense HetNets.

We present the average energy consumption of the three algorithms compared using Fig. 6. The simulation results illustrated that the proposed ITSC algorithm, the NR algorithm, and the EER algorithm experienced an average energy consumption of 3.4, 4.9 and 5.8 joules, respectively (Fig. 6). The use of DNN in the proposed algorithm ensured that energy is saved on the SBS when there is UE to connected to that SBS, hence, the ITSC algorithm provided a longer battery lifetime.

The proposed ITSC algorithm achieved that by putting the SBS into a sleep state when there is no UE currently connected that SBS. The NR algorithm and the EER algorithm experienced a higher average energy consumption, mainly because both algorithms failed to put SBS into a sleep state when there was no UE connected to that SBS.

Average network throughput: Network throughput refers to the rate at which the data is transferred from a MN to its destination. Using Fig. 7, we present the average network throughput of the three compared algorithms.

On average, the proposed ITSC algorithm, the NR algorithm and the EER algorithm have shown 97.4%, 93.4 and 92.3% throughput performance respectively, at a time interval of 100 seconds as exhibited using Fig. 7. The proposed ITSC algorithm produced higher network

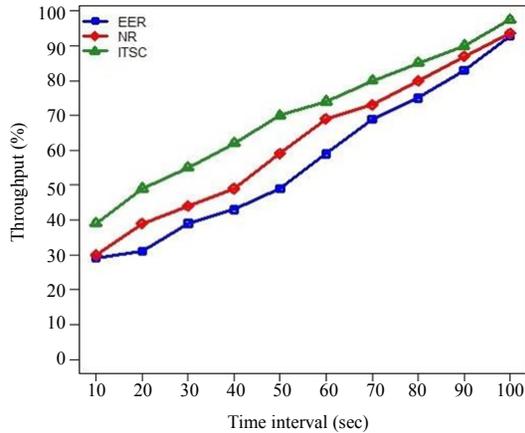


Fig. 7: Average network throughput

throughput mainly because the algorithm managed to reduce packet loss by using transferable payoff coalitional game theory. In addition, the use of DNN into the design of the proposed algorithm ensured that energy is saved on each SBS hence, the ITSC algorithm provided a longer battery lifetime. As a result, the proposed ITSC algorithm managed to satisfy the throughput QoS requirements such as reduced latency and packet loss, longer battery lifetime, reliability and high data rates. The NR algorithm and the EER algorithm failed to allocate higher bandwidth to real-time applications, hence, experienced higher packet loss which led to poor QoS.

CONCLUSION

This study presented the design of the proposed ITSC algorithm in order to satisfy the throughput QoS requirements such as reduced latency and packet loss, longer battery lifetime, reliability and high data rates. The ITSC algorithm was designed by integrating DNN and transferable payoff coalitional game theory. DNN was used to determine the cell capacity ratio for the SBSs. Hence, the SBSs cell capacity ratio was employed as decision criteria to put the SBSs into a sleep state. In addition, transferable payoff coalitional game theory was used in order to ensure real-time applications have a higher priority over non-real time applications.

Several NS-2 computer simulation results illustrated that the proposed ITSC algorithm experienced an average packet loss of 2.6%, the energy consumption of 3.4 joules and produced a network throughput of 97.4%. The proposed ITSC algorithm managed to satisfy the throughput QoS requirements such as packet loss, longer battery lifetime, reliability and high data rates. In the future, the proposed algorithm will be integrated with security algorithms in order to ensure that data is protected while being transmitted from the source to the destination.

ACKNOWLEDGMENT

The authors would like to thank the Tshwane University of Technology for financial support. The authors declare that there is no conflict of interest regarding the publication of this paper.

REFERENCES

1. Buthelezi, B.E., M. Mphahlele, D. DuPlessis, S. Maswikaneng and T. Mathonsi, 2019. ZigBee healthcare monitoring system for ambient assisted living environments. *Int. J. Commun. Networks Inf. Secur.*, 11: 85-92.
2. Mathonsi, T.E., O.P. Kogeda and T.O. Olwal, 2018. Intersystem handover decision model for heterogeneous wireless networks. *Proceedings of the 2018 International Conference on Open Innovations (IEEE OI 2018)*, October 3-5, 2018, IEEE, Johannesburg, South Africa, pp: 1-7.
3. Mathonsi, T.E., O.P. Kogeda and T.O. Olwal, 2017. A survey of intersystem handover algorithms in heterogeneous wireless networks. *Asian J. Inf. Technol.*, 16: 422-439.
4. Mathonsi, T.E. and O.P. Kogeda, 2016. Handoff delay reduction model for heterogeneous wireless networks. *Proceedings of the International IST-Africa Week Conference*, May 11-13, 2016, IEEE, Ultimo, New South Wales, pp: 1-7.
5. Mathonsi, T.E., 2015. Optimized handoff and secure roaming model for wireless networks. *Proceedings of the 2015 2nd International Conference on Information Security and Cyber Forensics*, November 15-17, 2015, IEEE, Ultimo, New South Wales, pp: 134-139.
6. Mathonsi, T.E., O.P. Kogeda and T.O. Olwal, 2017. Transferrable payoff based bandwidth allocation for small and medium enterprises. *Asian J. Inf. Technol.*, 16: 440-450.
7. Mathonsi, T.E., T.M. Tshilongamulenzhe and B.E. Buthelezi, 2019. Block chain security model for internet of things. *Proceedings of the Academics World 158th International Conference*, November 24th-25th, 2019, Cape Town, South Africa, pp: 52-56.
8. Nkosi, T.L., M.I. Mphahlele, S.O. Ojo and T.E. Mathonsi, 2019. Dynamic bandwidth allocation algorithm to improve quality of service on intelligent home networks. *Proceedings of the IEEE Open Innovations Conference 2019*, October 2-4, 2019, IEEE, Cape Town, South Africa, pp: 83-88.

09. Mathonsi, T.E. and O.P. Kogeda, 2014. Enhanced bandwidth sharing scheme for Small and Medium Enterprises. Proceedings of the World Congress on Engineering and Computer Science (WCECS) 2014, Vol. 2, October 22-24, 2014, IAENG, San Francisco, California, pp: 765-770.
10. Mathonsi, T.E. and O.P. Kogeda, 2014. Implementing wireless network performance optimization for Small and Medium Enterprises. Proceedings of the 2014 Pan African Conference on Science Computing and Telecommunications (PACT), July 14-18, 2014, IEEE, Pretoria, South Africa, pp: 68-73.
11. Olwal, T.O., K. Djouani and A.M. Kurien, 2016. A survey of resource management toward 5G radio access networks. IEEE. Commun. Surv. Tutorials, 18: 1656-1686.
12. Banerjee, I., P. Chanak, B.K. Sikdar and H. Rahaman, 2017. Energy efficient routing in wireless sensor networks. IEEE. Technol. Stud. Symp., 1: 1-6.
13. Karimpour, J. and J.Z.S. Abad, 2010. A new routing algorithm for wireless sensor networks. Proceedings of the 2010 International Conference on Computer Applications and Industrial Electronics, December 5-8, 2010, IEEE, Kuala Lumpur, Malaysia, pp: 328-333.
14. Zhang, X., S. Zhou, Y. Yan, C. Xing and J. Wang, 2015. Energy efficient sleep mode activation scheme for small cell networks. Proceedings of the 2015 IEEE 82nd Vehicular Technology Conference (VTC2015-Fall), September 6-9, 2015, IEEE, Boston, Massachusetts, pp: 1-4.
15. Soh, Y.S., T.Q. Quek, M. Kountouris and H. Shin, 2013. Energy efficient heterogeneous cellular networks. IEEE. J. Sel. Areas Commun., 31: 840-850.
16. Bogale, T.E. and L.B. Le, 2016. Massive MIMO and mmWave for 5G wireless HetNet: Potential benefits and challenges. IEEE. Veh. Technol. Mag., 11: 64-75.
17. ElSawy, H., E. Hossain and D.I. Kim, 2013. HetNets with cognitive small cells: User offloading and distributed channel access techniques. IEEE. Commun. Mag., 51: 28-36.
18. Maeno, T., K. Mori, K. Sanada and H. Kobayashi, 2016. Evaluation of energy efficiency for various handover methods in heterogeneous cellular networks with sleep control. Proceedings of the 6th International Symposium on Sustainability, Engineering, September 2016, Mie University, Tsu, Japan, pp: 9-10.
19. Shen, B., Z. Lei, X. Huang and Q. Chen, 2018. An interference contribution rate based small cells on/off switching algorithm for 5G dense heterogeneous networks. IEEE. Access, 6: 29757-29769.
20. Sun, H., X. Chen, Q. Shi, M. Hong, X. Fu and N.D. Sidiropoulos, 2017. Learning to optimize: Training deep neural networks for wireless resource management. Proceedings of the 2017 IEEE 18th International Workshop on Signal Processing Advances in Wireless Communications (SPAWC), July 3-6, 2017, IEEE, Sapporo, Japan, pp: 1-6.
21. Tang, L., Z. Lu and B. Fan, 2020. Energy efficient and reliable routing algorithm for wireless sensors networks. Applied Sci., Vol. 10, No. 1. 10.3390/app10051885
22. Zhang, D., G. Li, K. Zheng, X. Ming and Z.H. Pan, 2013. An energy-balanced routing method based on forward-aware factor for wireless sensor networks. IEEE. Trans. Ind. Inf., 10: 766-773.
23. Li, Y., J. Gao, Y. Yu and T. Cao, 2017. An energy-based weight selection algorithm of monitor node in MANETs. Proceedings of the 2017 International Conference on Computer, Information and Telecommunication Systems (CITS), July 21-23, 2017, IEEE, Dalian, China, pp: 1-5.
24. Kumar, N. and D.P. Vidyarthi, 2018. A green routing algorithm for IoT-enabled software defined wireless sensor network. IEEE. Sens. J., 18: 9449-9460.
25. Yuan, Y., W. Liu, T. Wang, Q. Deng, A. Liu and H. Song, 2019. Compressive sensing-based clustering joint annular routing data gathering scheme for wireless sensor networks. IEEE. Access, 7: 114639-114658.
26. Shah, B., F. Iqbal, A. Abbas and K.I. Kim, 2015. Fuzzy logic-based guaranteed lifetime protocol for real-time wireless sensor networks. Sensors, 15: 20373-20391.
27. Jan, B., H. Farman, H. Javed, B. Montrucchio, M. Khan and S. Ali, 2017. Energy efficient hierarchical clustering approaches in wireless sensor networks: A survey. Wirel. Commun. Mob. Comput., Vol. 2017, 10.1155/2017/6457942
28. Sabor, N., S. Sasaki, M. Abo-Zahhad and S.M. Ahmed, 2017. A comprehensive survey on hierarchical-based routing protocols for mobile wireless sensor networks: Review, taxonomy and future directions. Wirel. Commun. Mob. Comput., Vol. 2017, 10.1155/2017/2818542
29. Pantazis, N.A., S.A. Nikolidakis and D.D. Vergados, 2013. Energy-efficient routing protocols in wireless sensor networks: A survey. IEEE Commun. Surv. Tutorials, 15: 551-591.

30. Wang, F., L. Hu, J. Hu, J. Zhou and K. Zhao, 2017. Recent advances in the internet of things: Multiple perspectives. *IETE Tech. Rev.*, 34: 122-132.
31. Yu, J., Y. Qi, G. Wang, Q. Guo and X. Gu, 2011. An energy-aware distributed unequal clustering protocol for wireless sensor networks. *Intl. J. Distrib. Sens. Networks*, 7: 1-8.
32. Nokhanji, N., M.Z. Hanapi, S. Subramaniam and M.A. Mohamed, 2014. A scheduled activity energy aware distributed clustering algorithm for wireless sensor networks with nonuniform node distribution. *Int. J. Distrib. Sens. Networks*, Vol. 10, No. 7. 10.1155/2014/218678
33. Majma, M.R., H. Pedram and M. Dehghan, 2014. IGBDD: Intelligent grid based data dissemination protocol for mobile sink in wireless sensor networks. *Wirel. Pers. Commun.*, 78: 687-714.
34. Mathonsi, T.E., O.P. Kogeda and T.O. Olwal, 2019. Enhanced intersystem handover algorithm for heterogeneous wireless networks. *J. Adv. Comput. Intell. Inf.*, 23: 1063-1072.
35. Mathonsi, T.E., O.P. Kogeda and T.O. Olwal, 2017. Transferrable payoff based bandwidth allocation for small and medium enterprises. *Asian J. Inf. Technol.*, 16: 440-450.