Journal of Engineering and Applied Sciences 11 (Special Issue 2): 3080-3087, 2016
ISSN: 1816-949X

Geomorphometric Analysis of River Basins in East European Russia Using SRTM and ASTER GDEM Data

Maxim A. Ivanov, Oleg P. Yermolaev, Kirill A. Maltsev and Yerlan A. Shynbergenov
Kazan Federal University, Kremlevskaya St., 18, 420008 Kazan, Russia

Abstract: The spatial database of geomorphometric indices with the scale of 1:200000 was created for the first time on the basis of a basin approach for the East of the Russian Plain European part. The basins built in a semiautomatic mode on the basis of SRTM DEM and Aster GDEM were used as OTE here. Using the abovementioned DEM the basic morphometric relief characteristics such as slope, slope length, vertical subdivision, river network density, LS factor were calculated. The mean values of these characteristics were calculated for basins. Using the vectorized map of geomorphological zoning, the belonging of basins to the was determined. On the basis of the obtained geographic information database the main statistics of morphometric relief characteristics are calculated and the results are interpreted using the existing scales and classifications. The dispersion analysis method revealed statistically significant associations for a number of characteristics with geomorphological regions. The regularities of spatial changes concerning considered geomorphometric characteristics were revealed. All studies were performed on the project Russian Science Foundation (RSF), geography and geoecology of rivers and river basins of the European Russia spatial analysis, estimation and modeling.

Key words: Relief morphometry, Russian plain, SRTM, ASTER GDEM, geomorphological areas

INTRODUCTION

Information on relief morphometry is necessary to meet the challenges of the area geographic characteristics, its zoning, the assessment of erosion processes, the assessment of geo-environmental condition etc. Digital relief models which are based on regular coordinate grids, are widely used now by professionals working in various areas of geography and geomorphology (Maltsev *et al*., 2015; Yermolaev and Maltsev, 2014).

Hydrological and geomorphological studies are performed started in the mid-1970 by Dedkov and Mozzherin in the Department of Landscape Ecology at Kazan University. The main objective of this work at this stage is the creation of specialized GIS at different level of generalization, where river (drainage) basin acts as operational and territorial units.

The main purpose of this study is the performance of spatial analysis for several morphometric characteristics of the relief on the territory of the European part of Russia with the basin approach use. The basin approach at the geomorphometric analysis of the territory allows to describe as separate basins, so as the entire study area, acting as OTE.

Research problems: The calculation of morphometric parameters of relief in the basin geosystems of a studied area and the development of the corresponding spatial database; the statistical description of the results and their interpretation in accordance with the existing scales and graduations; the analysis of calculated characteristic spatial variability.

MATERIALS AND METHODS

The following materials were used as the source ones: Relief digital model with the spatial resolution of 100 m on the Eastern territory of the European part of Russia, prepared on the basis of SRTM and ASTER GDEM data (Yermolaev *et al*., 2014). The vector layer of second order basin geosystems built in an automated mode according to abovestated DEM (Yermolaev *et al*., 2014); Hydrologically corrected DEM (Yermolaev *et al*., 2014). The hydrographic network from topographic maps with the scale of 1:100 000 in vector and raster formats. The calculation of values and attribute database increase was performed using Map Info 10.5, ArcGIS 10, WhiteBox GAT 3.2. Lindsay (2014) and Quantum GIS 6.4 programs.

Initially, the basin area was calculated in km^2 using map info. It should be noted that the calculation of areas and lengths "on the sphere" was used to minimize the impact of the projection on the results as well as for their compatibility with the field data. Further, a number of relief morphometric parameters was calculated for the basins.

Corresponding Author: Maxim A. Ivanov, Kazan Federal University, Kremlevskaya St., 18, 420008 Kazan, Russia

Average slope: Slope raster slope (in degrees) was developed on the basis of DEM in ArcGIS. The average value in the basins is calculated in QGIS using zonal statistics.

LS topographic factor: There are various methods for this indicator calculation (Wischmeier and Smith, 1978; Desmet and Govers, 1996; Kinnell, 2005; Moore *et al*., 1991). The factor was calculated in WhiteBox GAT program using "Sediment Transport Index" tool according to the following formula:

$$LS = (m+1) \times \left(\frac{A_s}{22.13}\right)^m \times \sin\left(\frac{B}{0.0896}\right)^n$$

Where:

A_s = Specific catchment area
B = The local value of slope in degrees
m = Area value, usually taken equal to 0.4
n = Slope indicator, usually taken equal to 1.3

The following elements are developed for this in advance by hydrologically corrected DEM in Whitebox GAT package: local direction of flow model according to the algorithm "Deterministic 8" (O'Callaghan and Mark, 1984; Moore *et al*., 1991) and private catchment areas (Specific catchment area).

Slope length: In order to calculate the length of slopes hydrologically corrected DEM and the drainage system in a raster format were used. The calculation was performed in WhiteBox GAT program using the "Downslope Distance to Stream" function. In order to get an average value of a slope length within each basin, the pixels which lie on the borders of watersheds were left only from the resulting raster with slope lengths.

The depth of dissection was calculated as the difference between the maximum and the minimum height in each basin. In order to determine the density of the river network, the total lengths of rivers were calculated in km^2 within each basin (on the basis of drainage network vector layer) using MapInfo and then their ratio to the basin area was calculated.

RESULTS AND DISCUSSION

The analysis of the main morphometric parameters was performed. Originally the main statistical indicators were calculated (Table 1-9) (minimum, maximum, average, median, mode, mean-square deviation), the frequency histograms were built (Fig. 1-6) and the ranking of values was conducted in accordance with existing classifications or in an expert way, at the absence of such classifications. The maps were developed according to separate indicators and classifications.

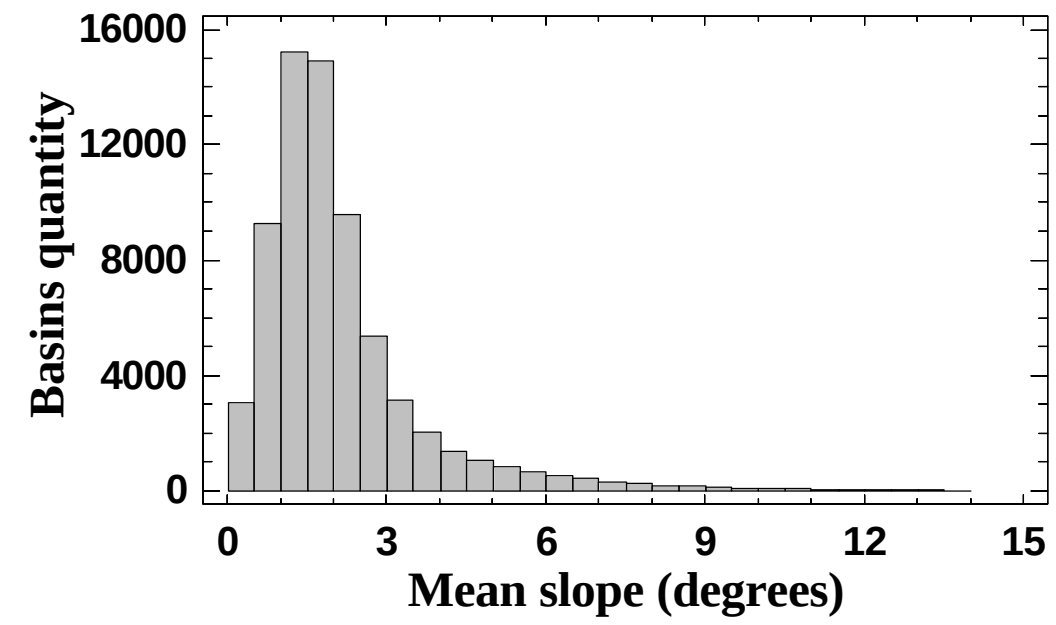

Fig. 1: Distribution of basins by slope

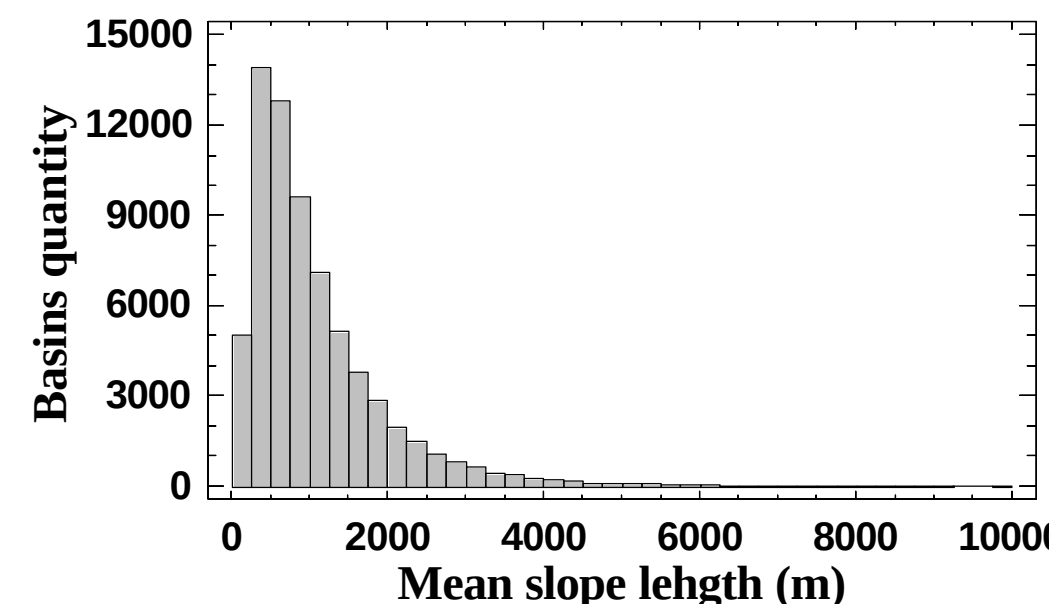

Fig. 2: Distribution of basins along slope length

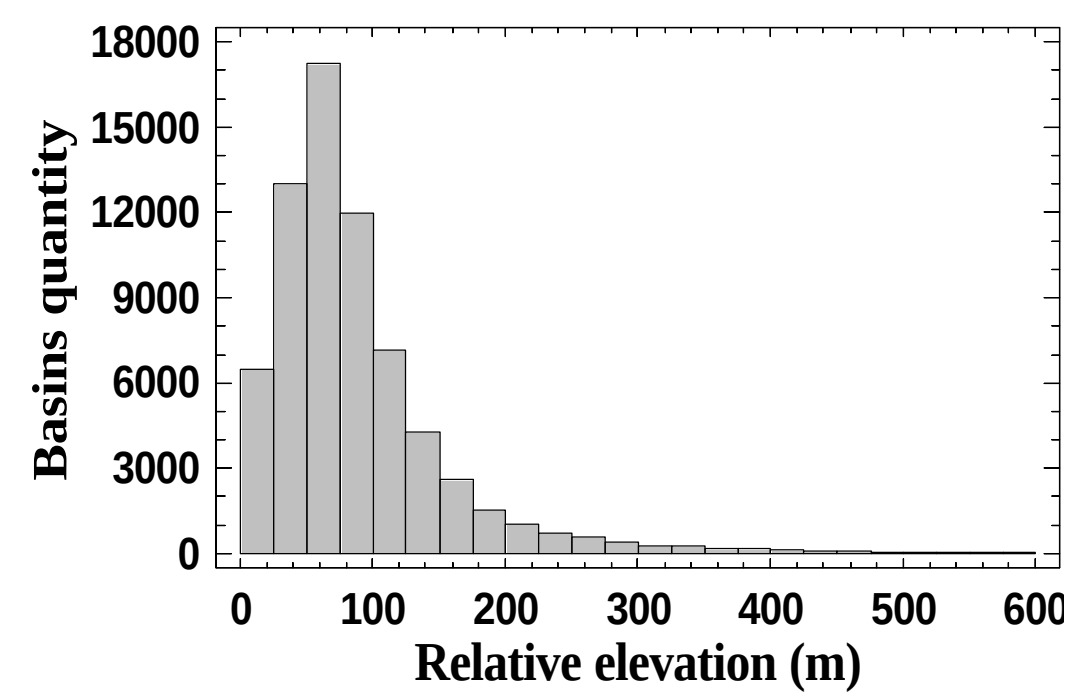

Fig. 3: Distribution of basins along dissection depth

Table 1: Main statistics (slope)

Tests	Values
Minimum	0.0005
Maximum	15.85
Average	2.08
Median	1.71
Mode	1.44
MSD	1.51

The total area of the studied area made 1,028,007.5 km^2. The scale proposed by Zhuchkova and Rakovskaya (1987) was used for the ranking of basins by slope (Table 2). Since, the classification is given

Table 2: Classification of basins by slope

Average slope (grades)	Relief form	No. of basins (pcs)	The share from total number (%)	Area (km^2)	The share from total area (%)
Plain territories					
<1	Flat (subhorizontal) plains	12275	17.84	278995.11	27.05
1-3	Weakly sloped plains (Very gentle slopes)	44486	64.67	625584.4	60.83
Gentle slopes					
3-5	Sloped plains	5927	8.62	50411.24	4.90
5-7	Very gentle slopes	889	1.29	7056.35	0.69
7-10	Average slopes	177	0.26	814.01	0.08
10-15	Steep slope	18	0.03	25.84	0.00
Mountain territories (degrees)					
<4	Flat and almost flat surfaces	1499	2.18	22441.57	2.18
4-10	Gentle slopes	3338	4.85	42678.98	4.15
10-20	Downward slopes	178	0.26	1 214.03	0.12

Table 3: Summary statistics (slope length)

Tests	Values
Minimum	100
Maximum	29778
Average	1092.47
Median	807
Mode	100.0
MSD	1051.12

Table 4: Classification of basins along the average length of slopes

Average length of slopes in a basin (m)	Slope category	No. of basins (PCs)	The share from total number (%)	Area (km^2)	The share from total area (%)
50-100	Very short	704	1.020	138.96000	0.010
100-200	Short	2707	3.940	1460.7400	0.140
200-500	Average length	15734	22.87	39137.150	3.810
500-1000	Increased length	22388	32.55	159399.86	15.50
1000-2000	Long	18913	27.50	349634.31	34.00
2000-4000	Very long	7069	10.28	326944.07	31.79
>4000	Extremely long	1272	1.850	151292.41	14.75

Table 5: Main statistics (dissection depth)

Tests	Values
Minimum	0.1
Maximum	1054.15
Average	89.25
Median	71.13
Mode	40.03
MSD	75.12

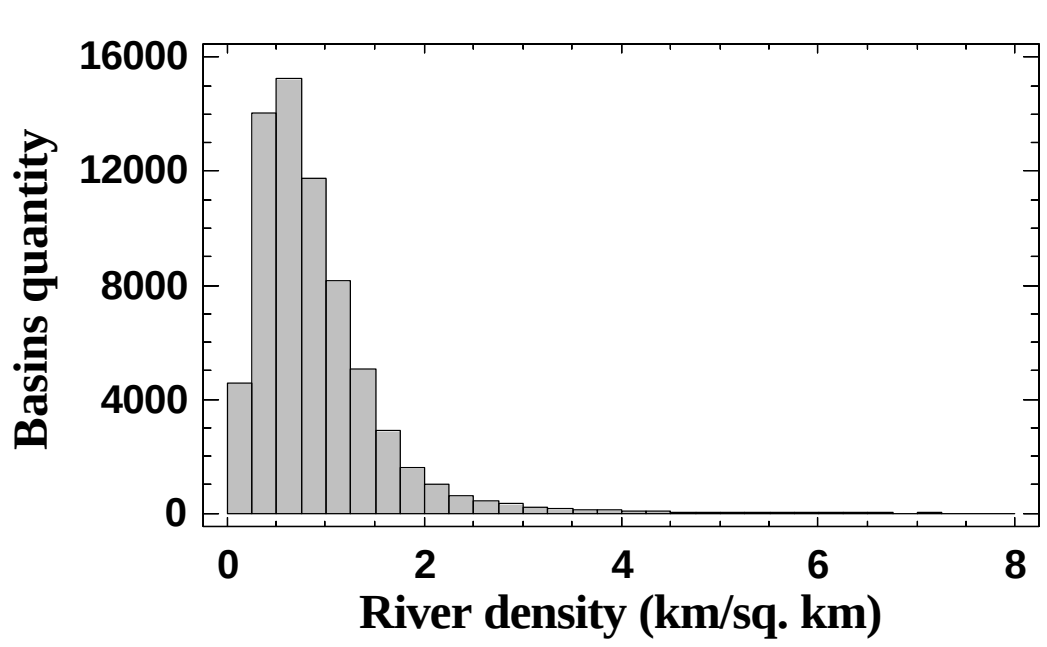

Fig. 4: The distribution of basins along river network density

separately for the plain and mountain areas the confinedness of basins to the platform complexes or orogens was determined in accordance with the Geomorphological map of the USSR at the scale of 1:2,500,000. Average length of slopes. Ranking (Table 4) was carried out in accordance with the classification of slopes along M.N. Zaslavsky's length (Zaslavsky, 1987).

Dissection depth: The scale of relative heights with 8 stages proposed by Kiryushin was chosen for ranking (Table 6). As the value of vertical dissection is calculated for elementary basins as in this study, the use of this scale is the most appropriate one. According to this scale the steps 1-5 are most typical ones for flat terrain, the steps 3-6 are most typical for foothills, the steps 4-6 for middle mountainous relief and the steps 6-9 for mountain relief.

River network density: In order to distribute the basins along the river network density researchers developed the scale based on this indicator volatility, depending on a landscape area (Table 8).

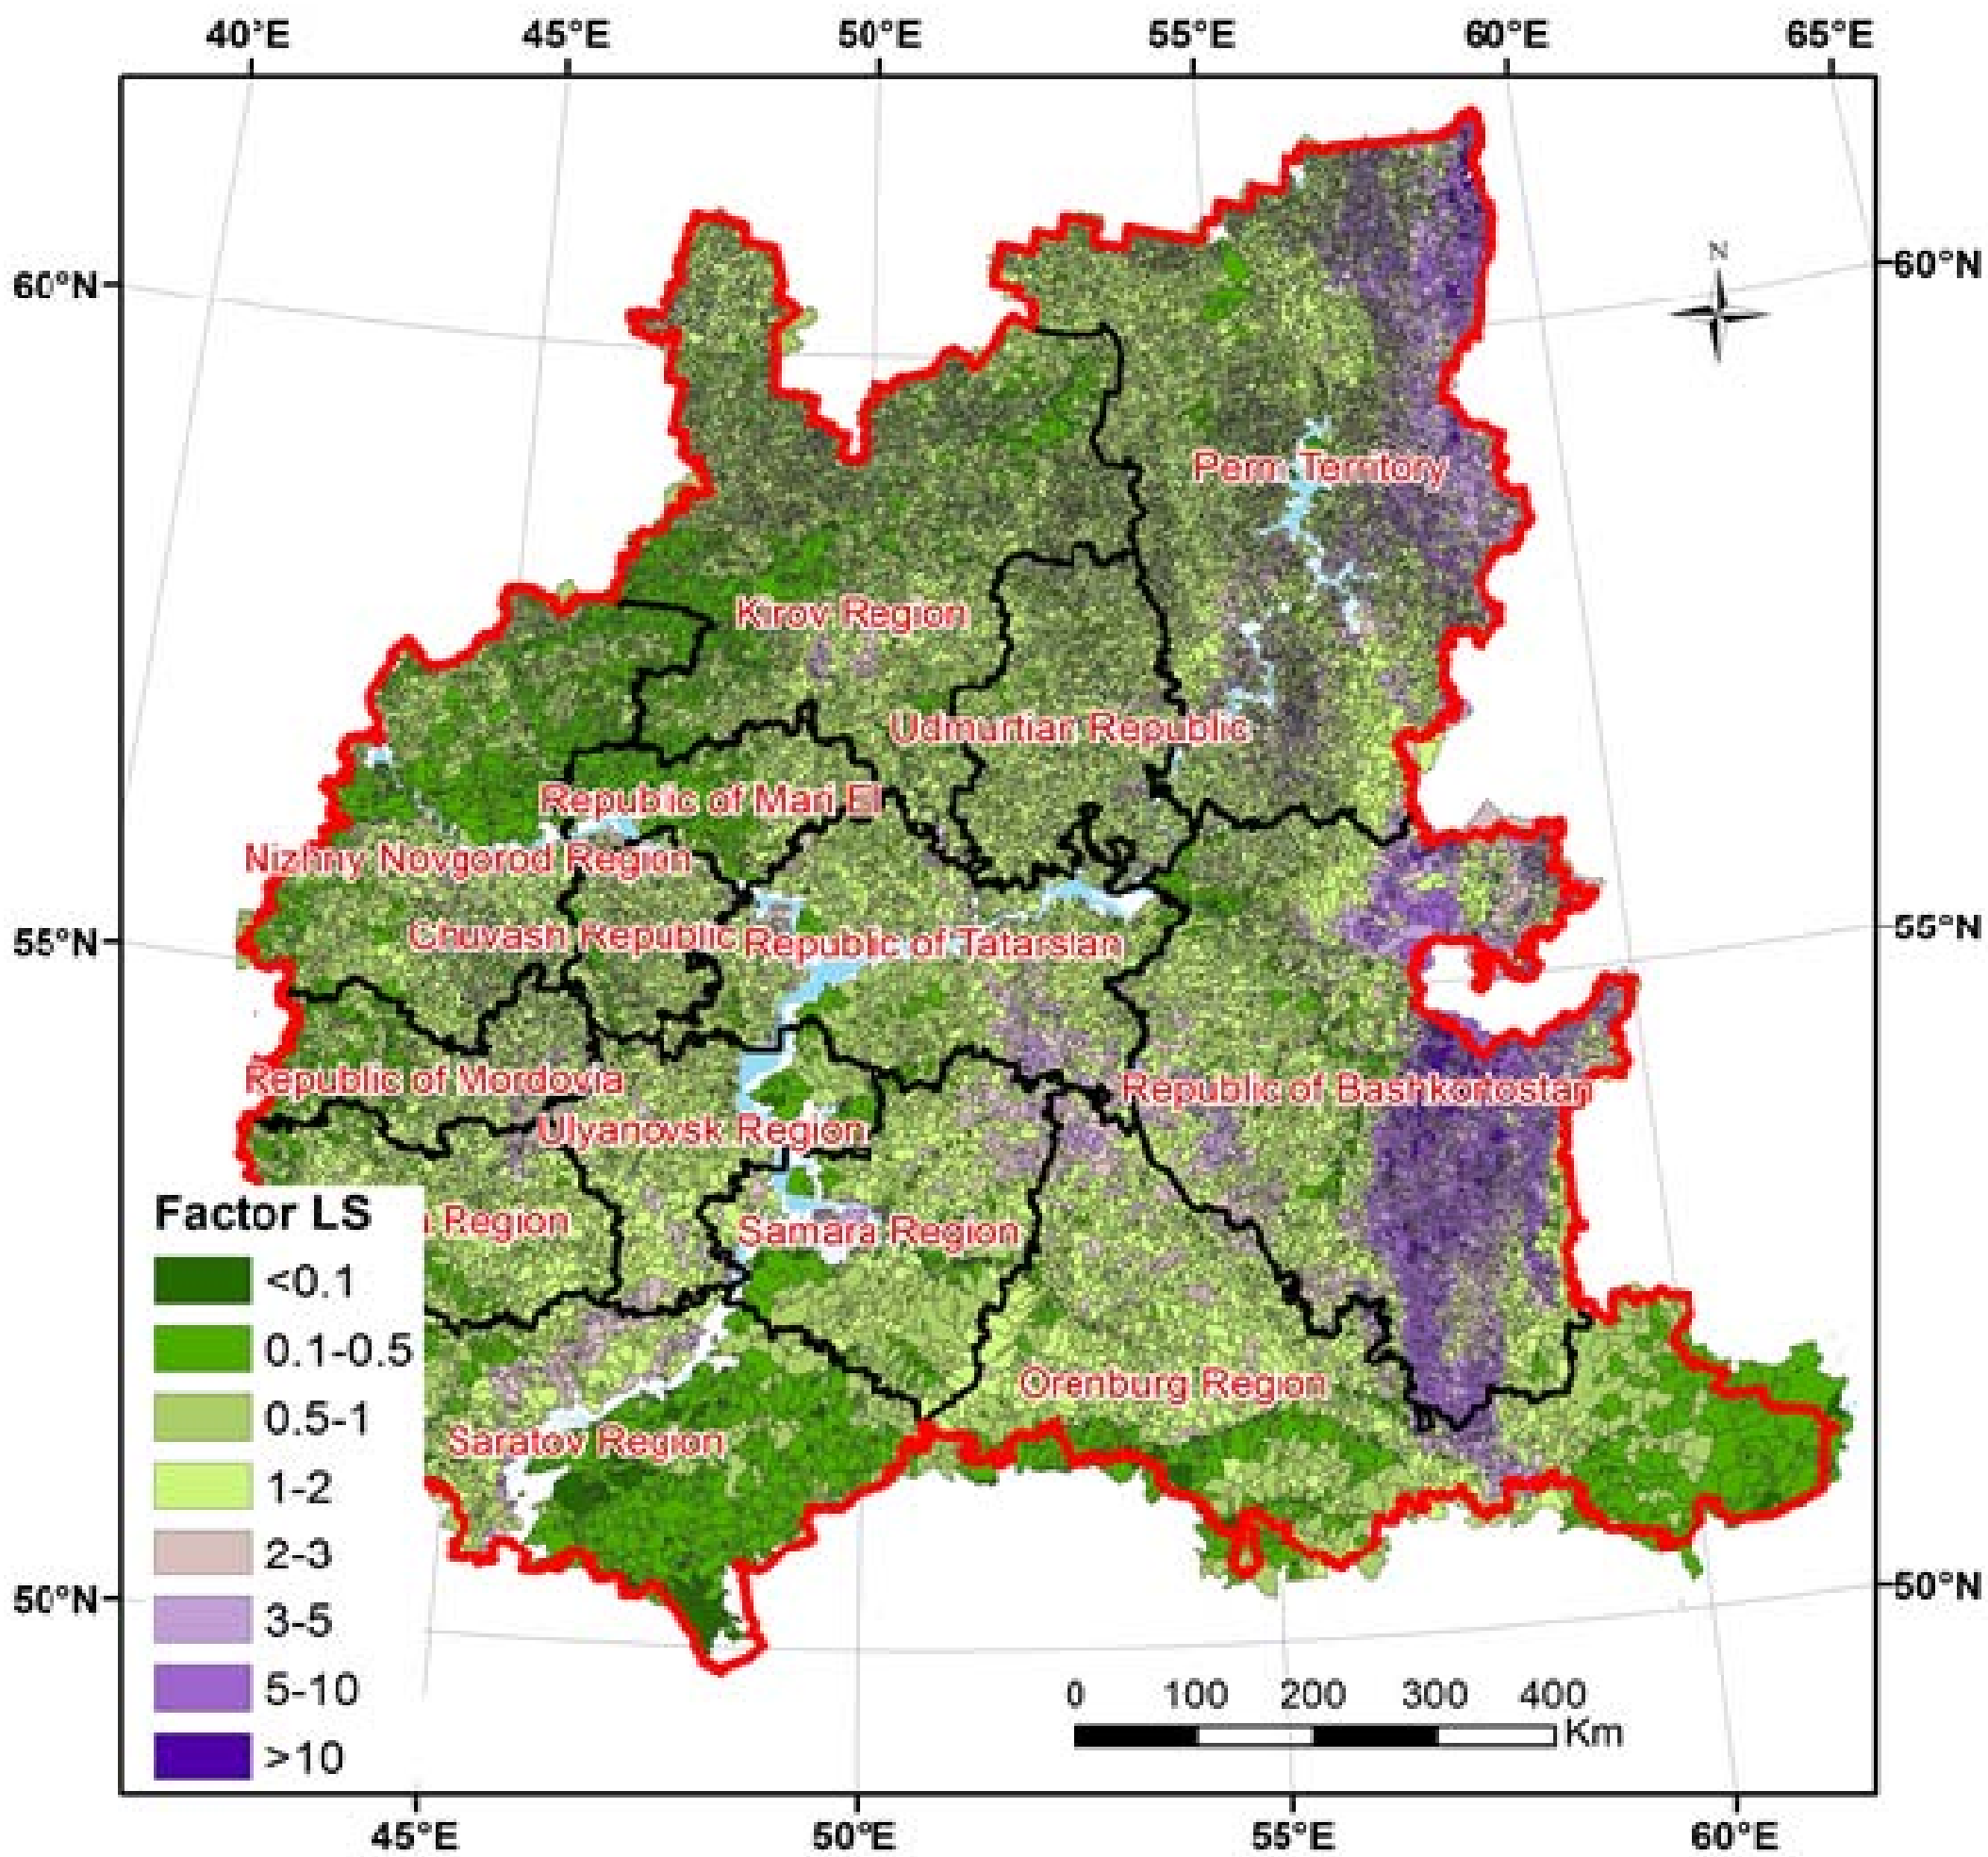

Fig. 5: Map of LS factor average values

Table 6: Classification of basins along dissection depth

Vertical dissection (m)	Step	No. of basins (pcs)	The share from total number (%)	Area (km^2)	The share from total area (%)
<5	1	1089	1.580	682.14000	0.070
5-10	2	1440	2.090	2474.9200	0.240
10-25	3	3969	5.770	16239.180	1.580
25-50	4	13029	18.94	100773.43	9.800
50-100	5	29267	42.55	397033.80	38.61
100-200	6	15637	22.73	397733.13	38.71
200-300	7	2726	3.960	76243.060	7.410
300-500	8	1319	1.920	27242.060	2.650
>500	9	311	0.450	9585.7800	0.930

LS factor: The gradation was chosen for LS factor (Fig. 5, Table 10), used by European ESDAC system (European Soil Data Centre) as part of the work on the calculation of this index across Europe (Panagos *et al*., 2015). The applicability of this gradation is conditioned by the use of the same DEM (SRTM and ASTER GDEM) at the calculation and the comparability of territorial coverage.

In order to identify the pattern of the spatial variability the morphometric parameters of relief were compared with USSR geomorphological zoning scheme, edited by S.S Voskresensky. According to this scheme, the region is located within three geomorphological countries: Russian plain, Novozemelsky-Ural plain and Turanskaya plain, including 7 provinces and 18 regions (Table 11).

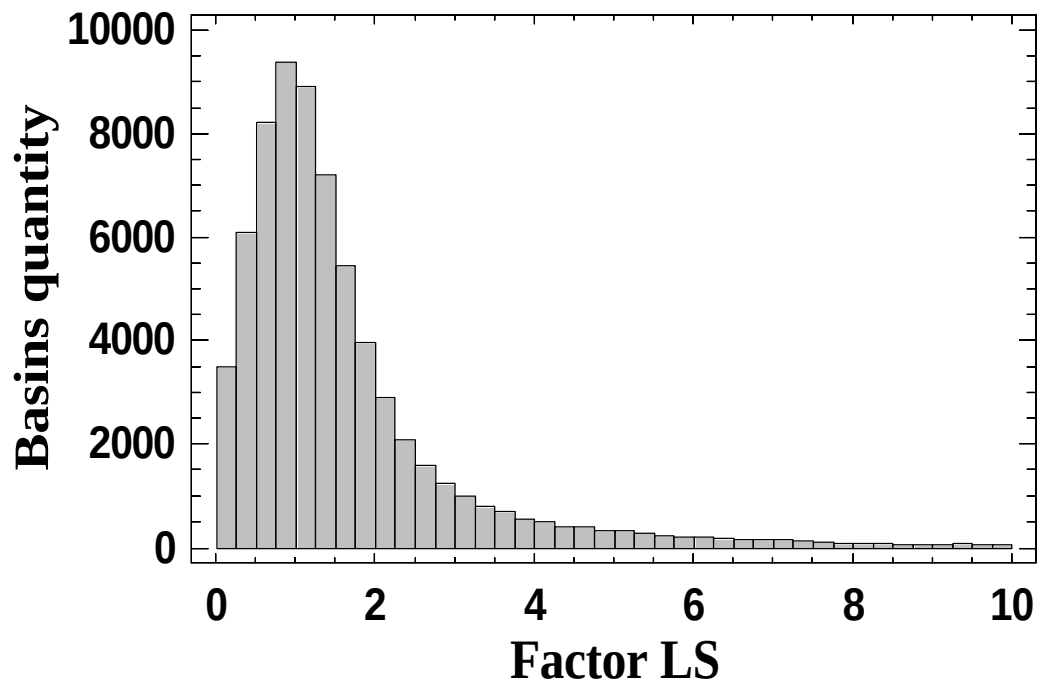

Fig. 6: Distribution of basins according to LS factor

In order to identify the values of morphometric parameters dependence on their affinity to a particular geomorphological area the dispersion analysis was used where indicators acted as a dependent variable performance and specific geomorphological areas acted as a factor.

Due to a large number of areas the analysis was conducted separately for the Russian Plain country and Novozemelsky-Ural country. Besides, the basins belonging to Pechora lowland areas (total number made 10 pcs.) the Caspian depression (total number made 65 pieces) and the basins belonging to the Turan plain (total number made 61 pcs.) were excluded from analysis due to their insignificant amount.

According to dispersion analysis results it can be argued that during the transition from one geomorphological area to another such morphometric values as slope, the depth of dissection and LS factor vary significantly. In all cases, the between-group dispersion is significantly larger than intragroup and $p<0.05$.

Dispersion analysis results: Low values of dissection depth are observed in the basins located in the areas with an accumulative type of relief; it is increased in basins dedicated to the areas with erosion-denudation relief (Fig. 7). Average slope values and, accordingly, LS factor behave slightly differently (Fig. 8).

In general, a pattern is preserved, but the minimum values of slopes are observed in basins dedicated to Subural plateau with a large depth of vertical dissection. This can be explained by two factors: the prevalence of such relief elements as plateau and low horizontal dissection. Thus, the predominance of the territory areas with the slopes close to zero, provides low values at an average deviation calculation. On the contrary, the

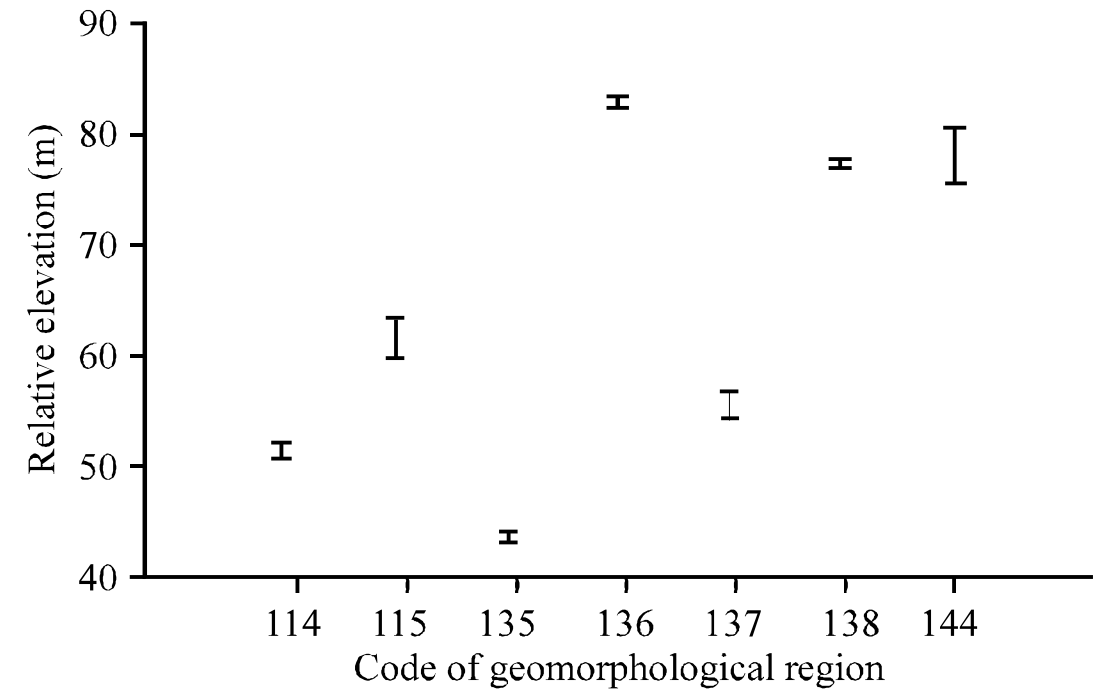

Fig. 7: The independence of Dissection depht on the geomorphological region of Russian plain

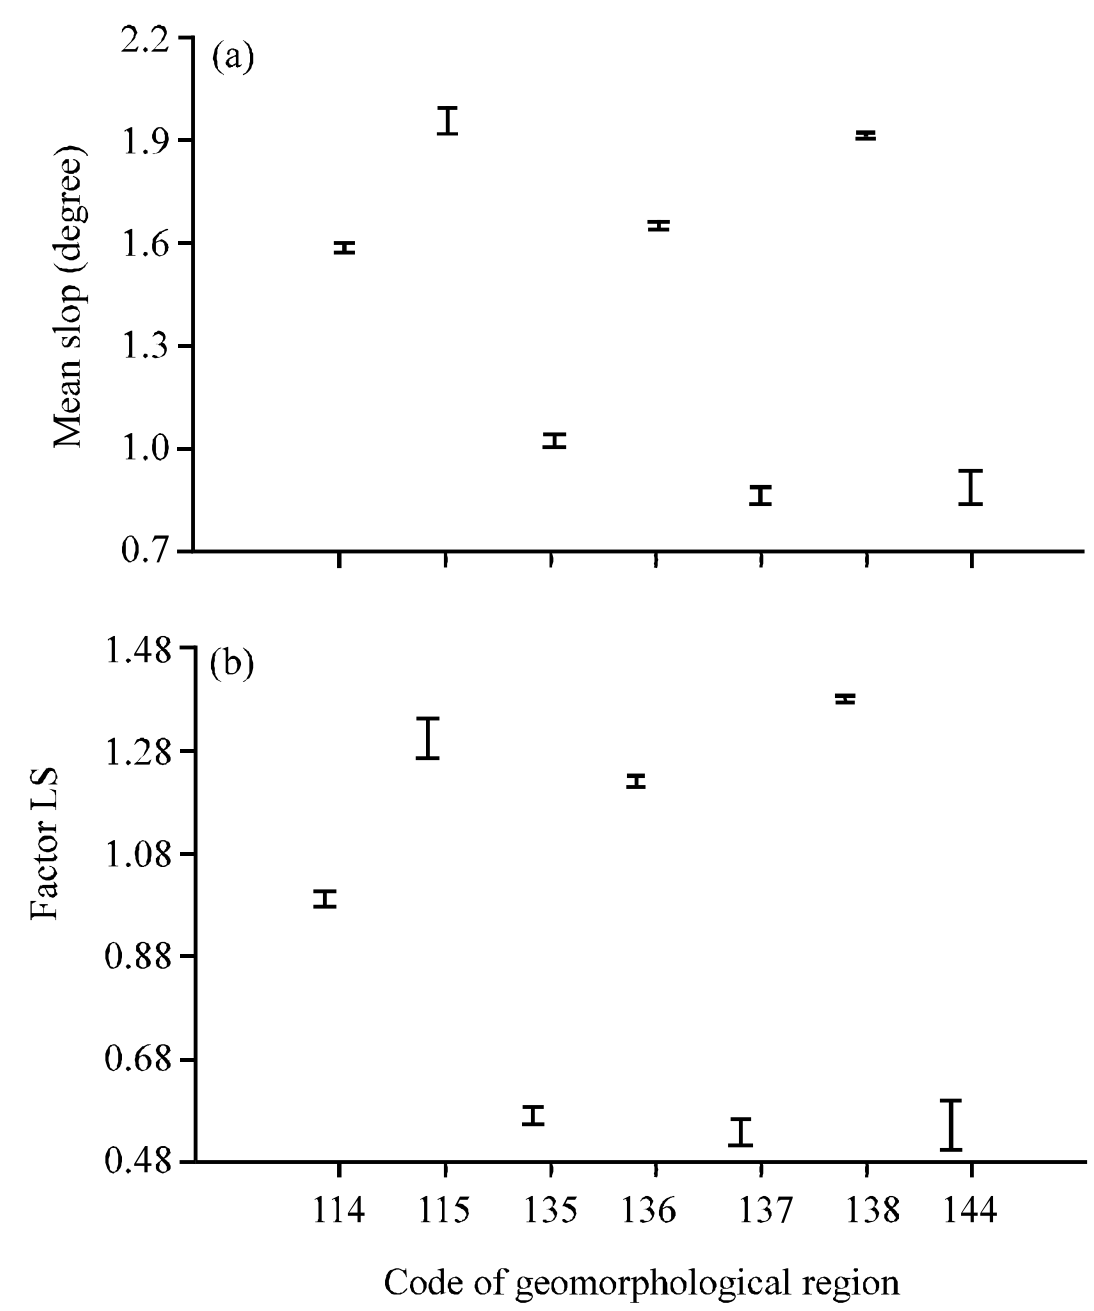

Fig. 8: a, b)The dependence of slope steepness (on the left) and Ls factor (on the right) on the geomorphological region of the Russian Plain

Table 7: Main statistics (river network density)

Tests	Values
Minimum	0
Maximum	9.15
Average	0.88
Median	0.73
Mode	0
MSD	0.69

average slopes in the basins located in Northern Dvina region are higher than expected ones at low values of vertical dissection. This is explained by the high density of the river network and therefore by a large number of slope complexes.

Table 8: Classification of basins according to river network density

River network density (km km^{-2})	No. of basins (pcs)	The share from total number (%)	Area (km^2)	The share from total area (%)
<0.2	4692	6.820	236044.89	22.95
0.2-0.4	9271	13.48	326211.85	31.76
0.4-0.6	12833	18.66	231071.59	22.47
0.6-0.8	11486	16.70	116545.44	11.33
0.8-1	9101	13.23	59370.010	5.770
1-1.2	6827	9.920	29753.840	2.890
1.2-1.4	4749	6.900	14870.900	1.450
1.4-1.6	3024	4.400	7003.6700	0.680
>1.6	6804	9.890	7135.3100	0.690

Table 9: Main statistics (LS factors)

Tests	Values
Minimum	0.000
Maximum	21.25
Average	1.66
Median	1.20
Mode	0.97
MSD	1.67

Table 10: Classification of basins according to LS factor

LS factors	No. of basins (pcs)	The share from total number (%)	Area (km^2)	The share from total area (%)
<0.1	923	1.34	7628.9900	0.74
0.1-0.5	8652	12.58	193018.95	18.77
0.5-1	17617	25.61	311217.38	30.26
1-2	25568	37.17	334481.55	32.57
2-3	7872	11.44	93871.040	9.130
3-5	4805	6.990	49346.320	4.800
5-10	2955	4.300	35023.920	3.410
>10	395	0.570	3419.3500	0.330

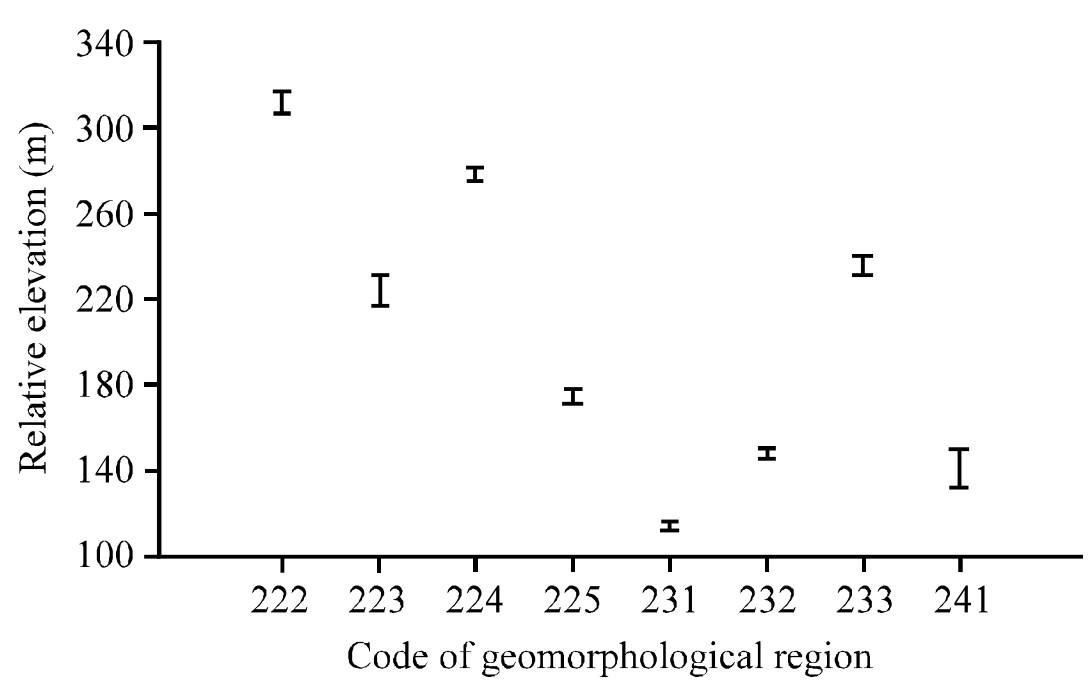

Fig. 9: The dependence of dissection depth on the geomorphological area of Novozemelsky-Ural country

The basins located within the Novozemelsky-Ural country are also identified as statistically significant patterns of spatial variability concerning relief morphometric characteristics. The maximum values of dissection depth correspond to the midland Province of the Urals axial zone. Minimum vertical dissection is noted in lowland areas and plateaus (Fig. 9). Relatively high

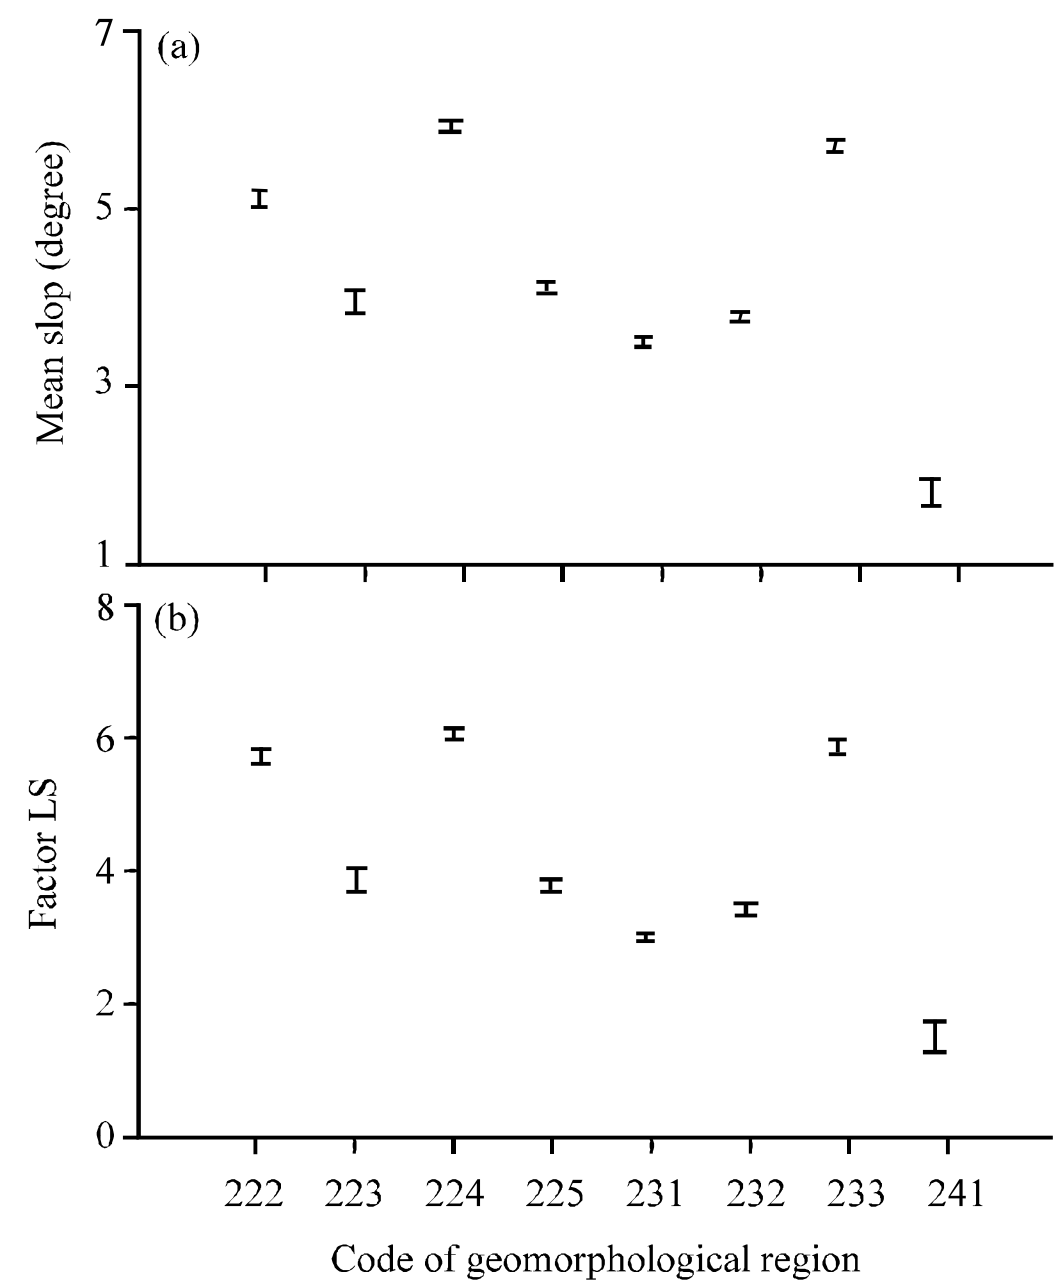

Fig. 10: a, b) The dependence of steep slopes (on the left) and LS factor (on the right) on the geomorphological area of Novozemelsky-Ural country

values in Sim Nugush ridge-remnant area is explained by the alternation of sharply outlined ridges with narrow and deep depressions. This also explains the high values of slope average steepness (and consequently LS factor LS) in the basins which are located in this region (Fig. 10).

The values of these factors in other geomorphological areas give quite a logical picture. Maximum deviations correspond middle mountains, low ones correspond to low mountains, and the minimum ones are observed in the Ural-Tobolsk plateau, characterized by aligned relief.average length of slopes and the river network density indicators do not demonstrate the dependency on geomorphological regions.

Table 11: Belonging of basins to geomorphological areas

Country/Province	Region	No. basins (pcs)	Area (km^2)	Region code
Russian plain				
Northern Russian province	Northern Dvina region	5769	42706,25	114
	Timan Ridge Area	849	6503,79	115
	Pechora Lowland area	10	174,99	116
Mid Russian province	Volga-Oka-Don plain area	3993	73296,2	135
	Volga region Uplands and Ergeni	9847	185402,24	136
	Low Volga region	1760	80042,87	137
	Upper Volga region	35840	460142,33	138
South Russian province	Caspian depression area	65	5073,87	141
	Subural plateau area	536	32316,23	144
Novozemelsky-Ural plain				
The province of Urals axial zone	Northern Urals steeply sloping ridge-midlands	729	8326,98	222
	The area of ridge-remnant low mountains of the Middle Urals	394	5957,6	223
	The area of middle ridge of the Southern Urals	1795	21651,61	224
	The area of low mountains and the plateaus of the Southern Urals and Mugodzhar	1443	30356,78	225
West Urals province	Parm area	2568	12691,84	231
	The Ufa-Chusovskaya area	1911	15350,79	232
	Sim Nugush ridge-remnant region	977	11904,69	233
East Urals province				
The area of the Ural-Tobolsk plateau	240	25848,4	241	
Turanskaya plain	Turgay Betpakdalinskaya 331 province	Turgay Plateau area	61	10260,04

CONCLUSION

For the first time a spatial database of these morphometric parameters for the watershed basins of the 2nd order was created. A quantitative and a spatial analysis of the calculated indicators was performed. The method of dispersion analysis revealed statistically significant relationships of these characteristics with geomorphological areas. Spatial variability trends of considered geomorphometrical characteristics identified during the study on the basis of a basin approach confirm the basic laws described by other researchers.

Thus, adequate data on relief morphometry in the basin ecosystems of the European part of Russia were obtained which can be used for the hydrological and geomorphological modeling, the geo-ecological assessment of the territory and for a number of other tasks.

ACKNOWLEDGEMENTS

The reseach (translation) is performed according to the Russian Government Program of Competitive Growth of Kazan Federal University. The work (methods, analysis and results) is performed according to the Russian Science Foundation (project [1]15-17-10008).

REFERENCES

Desmet, P.J.J. and G. Govers, 1996. A GIS procedure for automatically calculating the USLE LS factor on topographically complex landscape units. J. Soil Water Conserv., 51: 427-433.

Kinnell, P.I., 2005. Alternative approaches for determining the USLE-M slope length factor for grid cells. Soil Sci. Soc. Am. J., 69: 674-680.

Lindsay, J.B., 2014. The whitebox geospatial analysis tools project and open-access GIS. Proceedings of the 22nd Annual Conference on GIS Research UK, Aprill 6-18, 2014, The University of Glasgow, Glasgow, Scotland, pp: 1-8.

Maltsev, K.A., O.P. Yermolaev and V.V. Mozzherin, 2015. Suspended sediment yield mapping of Northern Eurasia. Proceedings of the International Conference on Association of Hydrological Sciences, December 11-14, 2014, IAHS Press, New Orleans, Louisiana, USA., pp: 326-332.

Moore, I.D., R.B. Grayson and A.R. Ladson, 1991. Digital terrain modelling: A review of hydrological, geomorphological and biological applications. Hydrol. Processes, 5: 3-30.

O'Callaghan, J.F. and D.M. Mark, 1984. The extraction of drainage networks from digital elevation models. Comput. Vision, Graphics Image Process., 28: 323-344.

Panagos, P., P. Borrelli and K. Meusburger, 2015. A new European slope length and steepness factor (LS-Factor) for modeling soil erosion by water. Geosci., 5: 117-126.

Wischmeier, W.H. and D.D. Smith, 1978. Predicting Rainfall Erosion Losses a Guide to Conservation Planning. 3rd Edn., USDA Agriculture Handbook, US Government Printing Office, Washington DC. USA., pp: 1-58.

Yermolaev, O.P. and K.A. Maltsev, 2014. Using dems for automatic plotting of catchments. Geomorphology, 1: 45-53.

Yermolaev, O.P., K.A. Mal'tsev and M.A. Ivanov, 2014. Automated construction of the boundaries of basin geosystems for the volga federal district. Geogr. Nat. Resour., 35: 222-228.

Zaslavsky, M.N., 1987. Erosion Study: Fundamentals of Anti-Erosion Farming; The Textbook for Geographical and Agricultural Universities. National Research University Higher School of Economics, Moscow, Russia, Pages: 376.