

An Overview of Cryogenic Separation Techniques for Natural Gas with High CO₂ Content

¹Bhajan Lal, ¹Azmi Mohd ¹Shariff, ¹Hilmi Mukhtar, ²Qazi Nasir and ¹Ali Qasim

¹Department of Chemical Engineering, Universiti Teknologi PETRONAS,
Bandar Seri Iskandar, 32610 Perak, Malaysia

²Department of Petrochemical Engineering, College of Engineering and Architecture,
University of Nizwa, Dahiyah, Ad Dakhiliyah Region, Sultanate of Oman

Abstract: In the wake of an unprecedented growth of the market demand for natural gases, exploration and utilization are necessary for high impurity wells worldwide. Therefore, it has become vital to conduct research work on the development of optimized and automated processes for removal of natural gas impurities mainly CO₂. Conventionally, CO₂ from natural gas streams are absorbed by amine solutions or other appropriate chemical solutions but cryogenic separation technology is suitable for use if the CO₂ content of the natural gas is high. In cryogenic separation, the process principle involves the separation based on the difference in volatility and desublimation. The cryogenic separation process is classified into conventional, non-conventional and hybrid techniques. Conventional process involves Liquid-Vapor (L-V) based separation. The non-conventional method includes Solid-Vapor (S-V) based separation while hybrid technique utilizes both conventional and non-conventional methods. Cryogenic research including both L-V and solid-vapor S-V based separation has recently shown several advantages and to enhance the separation performance and energy reduction, a novel concept of cryogenic hybrid (L-V and S-V) process is also discussed.

Key words: Natural gas, conventional cryogenic separation, non-conventional cryogenic technique, hybrid method, novel, streams

INTRODUCTION

The ever-growing energy demand has led to the reevaluation of the development potential of economically unviable, contaminated natural gas reserves at diverse regions of the earth. With increasing energy demand, development of reserves with high CO₂ contents up to 80% has become imperative, requiring new research efforts (Speight, 2007). Malaysia alone constitutes more than 13 Tscf of undeveloped natural gas because of the high CO₂ concentration. In some gas fields, the concentration of CO₂ exceeds 70%. Therefore, an optimum separation of CO₂ is necessary as it reduces the energy content of the gas and affects the selling price of the natural gas. While substantial literature exists for the removal of hydrocarbons and sulfur-containing gases at atmospheric pressures, a considerable amount of research work needs to be focused on the removal of CO₂ especially at the high pipeline pressures up to 60-80 bar (Garg *et al.*, 2017).

Various separation methods have been used for the CO₂ removal which includes chemical absorption,

adsorption and membrane separation (Garg *et al.*, 2017; Partoon *et al.*, 2016). The use of chemical based technologies is difficult and expensive especially in off-shore applications with a high concentration of CO₂ in natural gas. Cryogenic purification of natural gas has recently gained significant momentum in the global scenario because of several advantages of this clean and safe technology without the use of any chemical additives. The cryogenic separation technology has been known for several decades. However, this technology was not extensively studied due to the common perception of high expected cooling duty. Cryogenic separation involves no chemical reactions and CO₂ can be captured at high pressure as well as atmospheric pressure. The product carbon dioxide is very pure and can be piped as a liquid. Cryogenic separation process based is the difference in volatility and desublimation of gases. This process can be divided into three types, conventional, non-conventional and hybrid. Conventional methods employ liquid-vapor based distillation while in non-conventional methods, CO₂ can be desublimated onto the surface of the packing inside packed bed. The

hybrid cryogenic technique utilizes conventional cryogenic distillation networks in conjunction with de-sublimation based packed bed separators. Some of the advantages of the hybrid process are reduced energy requirement and equipment size (Maqsood *et al.*, 2014a-d).

Given the high complexity, study and understanding of thermodynamic phase behavior are a challenging and an industrially important task especially to design a more economical route for the production, transportation and refining projects. Knowledge of accurate thermodynamic behavior is an essential requirement for the development of chemical processes. Failure of process design can often be attributed to a lack of accurate data. Phase behavior (L-V and S-V domain) is very much affected by temperature, pressure and composition of a complex hydrocarbon system. Also, with the inclusion of Heavier Hydrocarbons (HHCs) in natural gas, the phase behavior of NG is different from the binary gas mixture as L-V region shift towards higher temperatures with the increasing content of CO₂. It was also shown that for binary CO₂-CH₄ gas mixture at increasing pressure values of 20, 30, 40 and 45 bar, the phase envelope in L-V region increased with a decrease in S-V region (Ali *et al.*, 2016). Currently, most of the phase behavior, L-V or S-V data available in the literature for binary and mixed natural gas component system are limited to high CO₂ at low-pressure content whereas data for the CO₂ rich mixed natural gas component system in L-V and S-V domain at high pressure are scarce in the literature.

In the present study, the hybrid cryogenic technique is proposed for separation of CO₂ from natural gas mixture components. This hybrid process separates the heavier hydrocarbons in L-V domain while CO₂ will be captured in S-V domain.

MATERIALS AND METHODS

Cryogenic separation process classification: The cryogenic separation process is classified into conventional, non-conventional and hybrid methods. The description and details of these processes are discussed in the following sections.

Conventional cryogenic separation process (L-V): Conventional Cryogenic Technology (CCT) process is carried out at a low temperature. CCT includes simple cryogenic distillation and extractive distillation. Cryogenic distillation is carried out at low temperatures and high pressures to separate CO₂ and other components based on their different boiling point. This method directly produces liquid CO₂ or CO₂ vapour at a high pressure

which reduces extra costs of compression for storage purposes. This technology is not economical and energetically viable for dilute gas streams. One of the major operating problems is the solid formation and choking of the column in distillation columns in both low and high-pressure ranges (Partoon *et al.*, 2016). Solid formation during separation of CO₂ has been reported in the literature (Donnelly and Katz, 1954).

Maqsood *et al.* (2014) conducted a study with different configurations of cryogenic distillation networks to remove CO₂ from NG feed with high hydrocarbons. It was found that higher operating pressure leads to a reduction of energy requirements but operational problems in distillation columns can arise due to the thermodynamic behavior of CO₂-CH₄ system due to CO₂ solidification (Maqsood *et al.*, 2014). Valencia *et al.* patented a method for separating carbon dioxide from methane using Helium as an additive which facilitated the separation process and prevented solid CO₂ formation. However, the separation of He from CH₄ at higher pressure is quite problematic as the mixture becomes azeotropic and difficult to separate. Atkinson *et al.* (1988) introduced a dual pressure distillation process intended for the removal of high concentration carbon dioxide from methane. It comprised of two distillation columns operating in different pressure to avoid carbon dioxide solidification (Atkinson *et al.*, 1988). Berstad *et al.* (2012) reported a low-temperature process for CO₂ removal from natural gas before liquefaction. They simulated a three distillation column network by using pentane as an additive in ASPEN Hysys with Peng-Robinson equation of State for the separation of CO₂ from natural gas. Their research included only simulation results and experimental work was not performed (Berstad *et al.*, 2012).

Non-conventional cryogenic separation process (S-V):

The non-conventional cryogenic technologies focus on separation of CO₂ via solidification of CO₂ in the S-V zone. Packed bed column is used at low temperature wherein CO₂ is desublimated onto the surface of the packing (Maqsood *et al.*, 2014).

Clodic *et al.* (2005) used a desublimating carbon capture system consisting of three heat exchangers. The first one condenses to water, the latter remaining water vapour and the last one de-sublimates carbon dioxide. They used a flat-plate heat exchanger for the desublimating stage. The system used by them was an inherently batch process, and the amount of CO₂ captured was small compared to the mass of the heat exchangers on which it was collected. It presented a significant practical problem. Also, the process did not handle the feed at higher pressure, so, high-pressure application is not

available. Separation of CO₂ from natural gas was not considered in the process and the process involved a binary mixture of carbon dioxide and hydrogen (Clodic and Younes, 2002; Clodic and El-Hitti *et al.*, 2005). Schah *et al.* worked on CO₂ capture from flue gas by de-sublimation. They modelled the process using ASPEN Plus featuring finned-plate heat exchangers (Schach *et al.*, 2011). Tuinier and Annaland (2012) employed dynamically operated cryogenic packed beds to separate CO₂ from a biogas mixture consisting primarily of methane and carbon dioxide. The process was based on the dynamic operation of packed beds, operated in cooling, capture and recovery steps. The method was not employed in high-pressure applications and did not include heavier hydrocarbons in the feed stream (Tuinier and Annaland, 2012). Ali *et al.* (2014) published a research where they have explored the minimization of energy consumption for a counter current switched packed bed intended to separate CO₂ and other components of natural gas. The effect of essential process parameters as feed composition, feed flow rate on energy requirement, bed saturation and bed pressure and cycling times were investigated (Maqsood *et al.*, 2014). Abul Hassan developed an experimental setup for cryogenic separation of CO₂ from natural gas with high CO₂ content. In this study, the CO₂ concentration was used up to 70%. The separation principle of CO₂ from natural gas was based on the de-sublimation principle in countercurrent cryogenic packed bed. Multiple cryogenic packed beds were used for CO₂ separation. The study dealt with the binary CO₂-CH₄ gas mixture and separation involving multi-component natural gas mixture containing up to higher hydrocarbons can further be performed (Karen, 2013).

RESULTS AND DISCUSSION

Hybrid technology (L-V+S-V separation): In the hybrid technique, conventional cryogenic distillation networks are used in conjunction with de-sublimation based packed bed separators as shown in Fig. 1. The hybrid technique is suitable for separation of a natural gas mixture containing heavier hydrocarbons with high CO₂ content and at high-pressure applications as the efficiency of the process is increased due to a combination of the conventional distillation process and non-conventional packed bed based process (Maqsood *et al.*, 2014).

Maqsood *et al.* (2014) presented a techno-economic evaluation of cryogenics network for CO₂ removal from NG with different feed compositions. Equipment sizing and cost estimation have been carried out by the

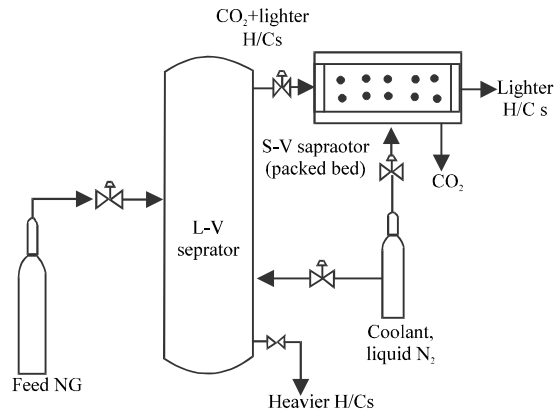


Fig. 1: Schematic of hybrid cryogenic separation process for NG purification involving heavier hydrocarbons

cryogenic networks using the correlations provided in the literature (Maqsood *et al.*, 2014). Ganguly *et al.* proposed different efficient cryogenic distillation sequences for purification of NG having a medium and high concentration of CO₂ contained. Calculations for conventional and hybrid distillation column sequences were performed using the heuristic and evolutionary strategies. It was found that hybrid cryogenic network required considerably lower energy and showed a significant reduction in capital cost of the columns compared to the conventional cryogenic network (Maqsood *et al.*, 2014). Recently, Maqsood *et al.* (2014) performed simulation work on NG separation components containing Heavier Hydrocarbons (HHCs) and feed gas containing 50 and 72% CO₂ content (Maqsood *et al.*, 2014).

CONCLUSION

Natural gas needs to be purified from impurities before it can be used as a fuel for commercial purposes. The presence of CO₂ in natural gas affects the calorific value of the gas and can also cause corrosion in the pipelines. Cryogenic separation technique is advantageous as it does not involve chemical reactions and CO₂ can be captured at high pressure as well as atmospheric pressure. The product carbon dioxide is very pure and can be piped as a liquid. Cryogenic separation technique is classified into conventional, non-conventional and hybrid. The conventional process includes liquid-vapor based distillation or extractive distillation technologies, e.g., natural gas liquefaction. Non-conventional method deals with solid-vapor desublimation, e.g., CO₂ separation from

biogas mixture. In the hybrid technique, conventional cryogenic distillation networks are used in conjunction with de-sublimation based packed bed separators. The main advantages of the hybrid process are reduced energy requirement, reduced equipment size and elimination of additive requirement.

ACKNOWLEDGEMENT

The researchers would like to thank Universiti Teknologi Petronas for financial support in the form of Yayasan Universiti Teknologi PETRONAS (YUTP) grant No. 0153AA-E16.

REFERENCES

- Ali, A., K. Maqsood, A. Redza, K. Hii and A.B. Shariff *et al.*, 2016. Performance enhancement using multiple cryogenic desublimation based pipeline network during dehydration and carbon capture from natural gas. *Chem. Eng. Res. Des.*, 109: 519-531.
- Ali, A., K. Maqsood, N. Syahera, A. Shariff and S. Ganguly, 2014. Energy minimization in cryogenic packed beds during purification of natural gas with high CO₂ content. *Chem. Eng. Technol.*, 37: 1675-1685.
- Atkinson, T.D., J.T. Lavin and D.T. Linnett, 1988. Separation of gaseous mixtures. US Patent and Trademark Office, Washington, DC., USA.
- Berstad, D., P. Neksa and R. Anantharaman, 2012. Low-temperature CO₂ removal from natural gas. *Energy Procedia*, 26: 41-48.
- Clodic, D. and M. Younes, 2002. A New Method for CO₂ Capture: Frosting CO₂ at Atmospheric Pressure. In: *Greenhouse Gas Control Technologies*, Gale, J. and K. Yoichi (Eds.). Elsevier, Kyoto, Japan, ISBN:0-08-043325-1, pp: 155-160.
- Clodic, D., R. El-Hitti, M. Younes, A. Bill and F. Casier, 2005. CO₂ capture by anti-sublimation thermo-economic process evaluation. *Proceedings of the 4th Annual Conference on Carbon Capture and Sequestration*, May 2-5, 2005, Hilton Alexandria Mark Center, Alexandria Virginia, pp: 2-5.
- Donnelly, H.G. and D.L. Katz, 1954. Phase equilibria in the carbon dioxide-methane system. *Ind. Eng. Chem.*, 46: 511-517.
- Garg, S., A.M. Shariff, M.S. Shaikh, B. Lal and H. Suleman *et al.*, 2017. Experimental data, thermodynamic and neural network modeling of CO₂ solubility in aqueous sodium salt of l-phenylalanine. *J. CO₂ Util.*, 19: 146-156.
- Karen, H.W.W., 2013. Cryogenic multiple bed dehydration and CO₂ separation during purification of natural gas. Master Thesis, Universiti Teknologi Petronas, Seri Iskandar, Malaysia.
- Maqsood, K., A. Ali, A.B. Shariff and S. Ganguly, 2014d. Synthesis of conventional and hybrid cryogenic distillation sequence for Purification of natural gas. *J. Appl. Sci.*, 14: 2722-2729.
- Maqsood, K., A. Mullick, A. Ali, K. Kargupta and S. Ganguly, 2014a. Cryogenic carbon dioxide separation from natural gas: A review based on conventional and novel emerging technologies. *Rev. Chem. Eng.*, 30: 453-477.
- Maqsood, K., A.H. Ali, A.M. Shariff and S. Ganguly, 2014b. Techno-Economic Evaluation of Cryogenic Networks for Separation of CO₂ from Natural Gas. In: *Applied Mechanics and Materials*, Ahmed, I. (Ed.). Trans Tech Publications, Switzerland, pp: 635-638.
- Maqsood, K., J. Pal, D. Turunawarasu, A.J. Pal and S. Ganguly, 2014c. Performance enhancement and energy reduction using hybrid cryogenic distillation networks for purification of natural gas with high CO₂ content. *Korean J. Chem. Eng.*, 31: 1120-1135.
- Partoon, B., O. Nashed, Z. Kassim, K.M. Sabil and J. Sangwai *et al.*, 2016. Gas hydrate equilibrium measurement of Methane+Carbon Dioxide+Tetrahydrofuran+Water system at high CO₂ concentrations. *Procedia Eng.*, 148: 1220-1224.
- Schach, M.O., B. Oyarzun, H. Schramm, R. Schneider and J.U. Repke, 2011. Feasibility study of CO₂ capture by anti-sublimation. *Energy Procedia*, 4: 1403-1410.
- Tuinier, M.J. and M.V.S. Annaland, 2012. Biogas purification using cryogenic packed-bed technology. *Ind. Eng. Chem. Res.*, 51: 5552-5558.