

Improvement of Energetic State for Resource Power Reduction in Mobile Ad-Hoc Networks

¹G. Balu Narasimharao, ²A. Jaya Lakshmi and ³P. Sai Kiran

¹Department of CSE, Lakireddy Bali Reddy College of Engineering (LBRCE),
KL University, Mylavaram, Vijayawada, India

²Department of CSE, DVR and Dr. Hima Sekhar MIC College of Technology,
Kanchikacherla, India

³Department of CSE, KL University, Vijayawada, India

Abstract: Remote Ad-hoc system is the decentralized sort of system and it doesn't depend on previous framework. The energy proficiency keeps on being a key consider restricting the send capacity of specially appointed systems. Conveying a vitality effective framework misusing the most extreme life time of the system has remained an extraordinary test, since, years. The significant worry in wireless system as of late is energy utilization. There are various calculations proposed to conquer this issue. In this study, we proposed a calculation called Energy Efficiency Dynamic State (EEDS) calculation. This calculation is intended to expand the system lifetime by constantly observing the individual hubs in the system, along these lines it builds the nature of administration of the system.

Key words: LEAD, virtual grid, EEDS, network lifetime, dynamic states, constantly, utilization

INTRODUCTION

System is the accumulation of hubs (PC frameworks) that can be associated together through the correspondence connect. The connection can be wired or remote. On the off chance that the hubs are associated through the air or space, then it is called remote system. Impromptu network is built for special purposes, it does not depend on the base stations or routers. Remote Ad-hoc system is not concentrated and have structure which contains gathering of hubs in particular range. Each individual hub partaking in directing to forward the information to different hubs. To enhance the nature of administration we have to enhance for the most part the 3 parameters that are, PDR (Packet conveyance Ratio) is the fundamental parameter to quantify the system execution. PDR is characterized as the Ratio between the aggregate number of bundles gotten to the aggregate number of parcels sent by the hubs. Throughput is the second fundamental parameter. In systems, throughput is characterized as the measure of information can be sent by the source hub per unit time (normally, it can be measured by bits every second (bps)). Network lifetime is the most fundamental parameter to enhance the execution of the system. It is the time taken by the hub at which it begins taking an interest in steering until the hub coming

up short on vitality. While enhancing the over 3 parameters we ought to avoid the attacks to the hubs, reduce the clog and movement and keep up the vitality.

Literature review: Mishra *et al.* (2011) proposed the calculation called LEAD that arrangements with the vitality effectiveness round planning of group head portion of hubs. After that the customary hubs are designated to the group sets out toward expanding the system lifetime utilizing and calculation.

Sumithrad proposed the and a calculation which contains two calculation which are covering calculation and reconfigure calculation.

Singh *et al.* (2010) proposed Homogeneous Clustering Algorithm (HCA) the entire system is practically separated into zones in light of topographical format and thickness of the system and it guarantees the uniform choice of group heads.

Sasikala *et al.* (2014) proposed HEED (Hybrid Energy Efficient Distributed) grouping strategy expands the system lifetime by appropriating the vitality utilizations and it makes all around circulated bunch heads. Notice amplifies the plan of LEACH.

Heinzelman *et al.* (2000) proposed LEACH-low energy adaptive clustering hierarchy. In LEACH it will arbitrarily disseminates the vitality among the hubs in the

system. The hubs in the system sort out themselves as a neighborhood organize and appoint a bunch head. Drain pack the information which is sent from the bunch heads to the BS. Hence, forth it lessens the vitality dispersal. So, it improves the system lifetime.

Deosarkar *et al.* (2008) proposed the thought prompted the development of the sensor organize as various bunches with a progressively chose group head hub is just permitted to forward the information to the sink. Xue and Ganz (2004) proposed a cell helped UE CH determination calculation for the WSN which considers a few parameters to pick the ideal UE entryway CH. They break down the vitality cost of information transmission from a sensor hub to the following hub or passage and compute the entire framework vitality taken a toll for a WSN.

Lukachan and Labrador (2004) consider these issues in the outline of a basic, versatile, vitality proficient area helped directing (SELAR) convention for WSN. In SELAR, area and vitality data of neighboring hubs together with the area data of the sink hub are utilized to play out the directing capacity. Aslam *et al.* (2011) display a novel vitality effective group development calculation in light of a multi-basis streamlining strategy. Our strategy is fit for utilizing numerous individual measurements in the group head determination handle as information while at the same time improving on the vitality proficiency of the individual sensor hubs and in addition the general framework.

Ergen and Varaiya (2005) look at two multi-jump steering plans the main amplifies the base lifetime of the hubs the second limits add up to vitality utilization. We consider both the transmission vitality and circuit vitality spent in transmission and in addition the gathering vitality.

Lv *et al.* (2002) proposed a replication procedure in distributed frameworks. In this exclusive, hubs that demand a question make duplicates of the protest.

Cohen and Shenker (2002) proposed two diverse imitation techniques uniform and relative yield a similar normal execution on effective questions.

Giwon proposed the dynamic replication for shared systems. It fundamentally centered around handle of reproduction situation issue.

MATERIALS AND METHODS

Simulation

Network formation: Simulation is regulated using NS2 2.35. Because of the link stability and route lifetime, no route overhead was considered in our simulation. In 500 X 500 area, mobile nodes exist. Square area is used to increase average hop length of a route with relatively small nodes. Every mobile node is moving based on the

mobility data files that were generated by mobility generator module. A number of 50 nodes is created. The transmission range is fixed at 100 m. About 100 nodes have destinations and try finding routes to their destination nodes. Maximum speed of node is set to 20 m/sec. The nodes are assigned with an initial position. All nodes do not stop moving and the simulation second is 500 sec.

Algorithm 1; Intialization of nodes:

```
*Configure node
$ns node-config-adhocRouting $val (rp)/
  -llType $val (ll)/
  -macType $val (mac)/
  -ifqType $val (ifq)/
  -ifqLen $val (ifqlen)/
  -antType $val (ant)/
  -propType $val (prop)/
  -phyType $val (netif)/
  -channelType $val (chan)/
  -topoInstance stoop/
  -agenttrace ON/
  -routerTrace ON/
  -macTrace OFF/
  -movementTrace OFF/
  -energyModel $val (energy model)/
  -initialEnergy $val (initial energy)/
  rxPower 35.28e-3/
  txPower 31.32e-3/
  idlepower 712e-6/
  -sleepPower 144e-9
```

In this study, we describe the EEDS algorithm. Initially, the network is divided into virtual grids. Each virtual grid is assigned with n number of nodes based on their current position. The nodes which are in the same virtual grid are designed in such a way that these nodes within a grid will rely on one another, i.e., any node in the virtual grid can assign its work to the any other node which is present in the same virtual grid.

In this study, we discuss about three different states where a node can enter to conserve its energy). Active state it contains the nodes which is actively participating in the routing process). Night mode it contains the nodes which are idle and it is in a energy consuming state) (Table 1). Discovery state it contains nodes which are ready to participate in routing process (Fig. 1 and 2).

Let us consider the node in active state which is participating in routing. Initially the energy of the node is considered to be cent percent. During the process of routing, the energy of the node will be consumed for every transmission and reception of packets. Once, the simulation is started the nodes which involve in packet transfer will lose energy. When a particular node's energy is consumed upto 10%, then the node is moved to night mode state where the node is idle for a certain timestamp. In this mode, the node will be idle or inactive and consumes its energy, so that, it can be active in the

Table 1: Inferences of related works

Proposed method	Algorithm used	Tools used	Years of publication	Inference
Energy efficiency based on round scheduling of cluster head allocation of needs	LEAD	NS-2	2011	This algorithm quite outperforms the traditional energy efficient by 35%
Energy efficiency based on homogeneous cluster	HCA	NS-2	2010	The life span of the network is increased by ensuring a homogeneous distribution of nodes in the cluster
Search and replication in unstructured peer-to-peer networks	Gnutella's query algorithm	GloMoSim	2002	It can find data reasonably quickly while the network reducing the network traffic
QoS controlled dynamic replication in the Peer-to-Peer systems	Replica placement algorithm	GloMoSim	2002	IT tackled the replica placement problems and studied the effects of the number and location of replicas on reached QoA

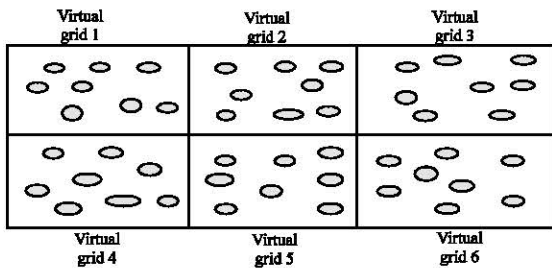


Fig. 1: Representation of virtual grids of the network

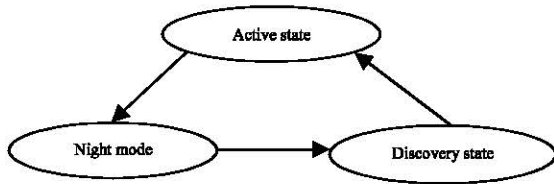


Fig. 2: Routing process

network more than a stipulated time. In this state the node's energy will remain constant as it does not involve in any kind of process. The buffer size of each state is set to 5. This implies that any state can accommodate 4 nodes simultaneously, since, a free space should be allocated for a new node entering into the state. When the fifth node enters into the buffer, the first node that entered into the buffer will move towards the discovery state indicating that it is ready to actively participate in the routing process.

In discovery state, the node consumes half of the energy when compared to the energy consumed by the active state, since, it triggers an alarm periodically indicating that it is ready to enter into the active state. The node triggers an alarm when it is in a discovery state for a time stamp greater than T.

Similarly, when a node in active state loses 10% of its energy and wants to move to the night mode, it send a request message to discovery state for a node to enter the active state. This process continues, although, the simulation for efficient energy management of each node in the network which in turn increases the overall network

lifetime. As discussed earlier, the nodes in the virtual grid are mutual to each other when one node enters into the night mode, it assigns its work to the neighbouring node in the same virtual grid. Consider the following routing process which denotes the shortest path form source (a) to destination (h).

Figure 3 shows the source and destination nodes named as a and h, respectively. The intermediate nodes are b-e. The packets are transferred from a to h through b-e. Here, the nodes d and e consumed 10% of energy and so, these two nodes are ready to enter into the night mode to conserve its energy.

Figure 4 represents the nodes d and e are in the night mode state and it does not consumes energy and remains the same until it enters into the discovery state.

Figure 5 represents the nodes d and e assigns their work to the neighbouring nodes f and g, respectively. Hence, in the routing process nodes f and g participate on behalf of nodes d and e, respectively. Assigning a nodes work to some other is done by duplicating its id whenever necessary (Algorithm 2).

Algorithm 2; Code to print position and energy:

```

1005 Packet Transmission Routines
1006 */
1007
1008 void
1009 AODV: forward (aodv_rt_entry*rt, Packet *p double delay)    {
1010 Struct hdr_cmn *ch =HDR_CMN (p)
1011 Struct hdr_ip *ih =HDR_IP(p)
1012 //****Code to print Node position and Energy: Manoj
1013 iNode = (MobileNode*) (Node: : get_node_by_address (index));
1014 xpos = iNode-> X()
1015 ypos = inode-> Y()
1016 iEnergy = iNode->energy_model ()->energy ()
1017 Printf (" at Time (%.6f), Position of %d is X: %.4f and Y: %.4f/n",
CURRENT_TIME, index, Xpos, Ypos)
1018 Printf ("at Time (&.6f), Up dated energy for Node %d is
Energy %.4f/n", CURRENT_ TIME, index , iEnergy
1019 //*****
1020
1021 if (ih->ttl) == 0) {
1022
1023 #ifdef DEBUG
1024 fprintf (stderr, "%s: calling drop
()/n", _PRETTY_FUNCTION)
1025 #and if/DERUG

```

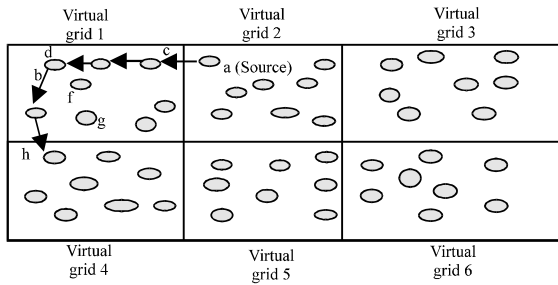


Fig. 3: Actual shortest path from source to destination

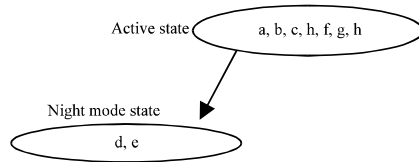
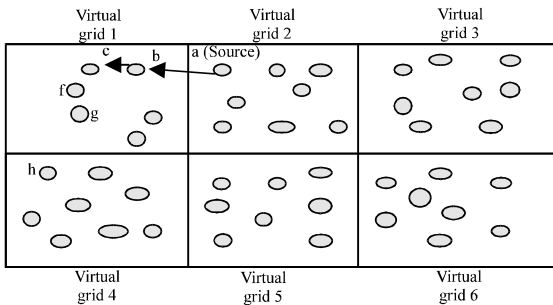


Fig. 4: Represents of nodes in night mode state

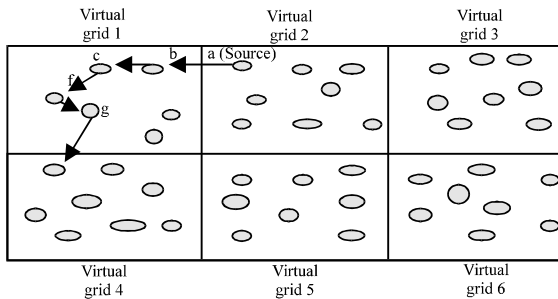


Fig. 5: Representation of the node assigning its works to its neighbouring nodes

Algorithm 3; Energy Efficient Dynamic State (EEDS):

INPUT: N nodes with 100% of energy
Z-Buffer Sizes, T-Time Stamp

1. Initialize n nodes to the network
2. Form the virtual grids
3. IF node losses 10% energy
4. Assign its work to its neighboring node
5. Node enters into night mode
6. IF No. of nodes in the night mode $\geq z-1$
7. First node is transferred to the discovery state
8. IF node in the discovery state exceeds timestamp T
9. Node triggers the alarm
10. Enter into the active state

11. ELSE
12. Occupy the buffer until the No. of nodes $< z$
13. ENDF
14. ELSE
15. Continue the routing process
16. ENDF

EEDS algorithm: This Algorithm 3 is found to be more efficient than existing algorithms, since, entire network lifetime is maintained uptime throughout the simulation.

RESULTS AND DISCUSSION

The packets are routed very efficiently by nodes that are actively participating in the routing process. The packet loss ratio is evaluated with the parameters such as number of packets sent and number of packets received. It is inferred that as the number of nodes with minimum energy increases with respect to the simulation time the packet loss ratio increases gradually as shown in Fig. 6. The calculated packet loss ratio is lesser than the.

From Fig. 7, it is inferred that once the energy efficiency dynamic state algorithm has been incorporated with the routing protocol the results produced are far better than the other traditional methods used for energy efficiency. Here, the packet drop ratio is tremendously reduced when each and every node in the network can actively participate in transmitting and receiving the packets beyond a stipulated timestamp. Similarly the obtained results for throughput also infer that results are better than other existing works. EEDS Algorithm has been compared with other routing protocols for comparison value that obtained without any energy efficiency algorithm incorporated in nodes in the network.

Table 2 the nodes lifetime are compared with respect to simulation time. The results obtained are more encouraging that above 80 percentage of the nodes maintain its energy level above 50 percentage after the end of simulation. This shows that the entire network can perform more than a expected timestamp with uptime efficiency (Algorithm 4).

Algorithm 4; Computation of energy level after simulation:

```

For {set i 0} {Si<Sval (nm)} {incr i} {
Set CE (Si) [expr SinitialEnergy (Si)-SfinalEnergy (Si)]
Puts Sen *Energy consumption (S) = SCE (Si)*
}
set energyConsumption 0
for {set i 0} {Si<Sval (nm)} {incr i} {
set energyConsumption {expr SCCE (Si)+SEnergyConsumption}
}
    
```

Simulation time	No. of nodes >50% energy level
100	50
200	49
300	47
400	43
500	41

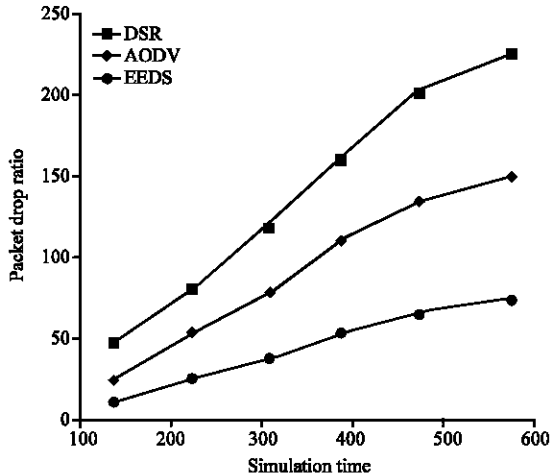


Fig. 6: Packet drop ratio comparison between AODV, OLSR and EEDS

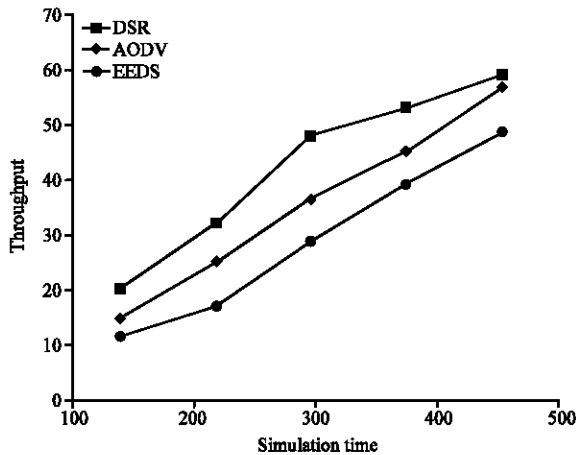


Fig. 7: Throughput comparison between EEDS, ADOV and DSR

CONCLUSION

Network lifetime is considered to be the major impact that influences the performance of the network. This Paper Proposed a solution to improve the entire lifetime of the network by monitoring the nodes continuously. The energy efficiency dynamic state algorithm enhances the nodes performance throughout the simulation by maintaining the energy of the node uptime than other traditional methods used to provide energy efficiency.

Since, all the nodes can actively perform in the routing process beyond the expected timestamp the overall performance is also increased.

SUGGESTIONS

Our future research will be implementing this algorithm that can sustain the attacks and still maintain the same quality of service.

REFERENCES

Aslam, N., W. Phillips, W. Robertson and S. Sivakumar, 2011. A multi-criterion optimization technique for energy efficient cluster formation in wireless sensor networks. *Inf. Fusion*, 12: 202-212.

Cohen, E. and S. Shenker, 2002. Replication strategies in unstructured peer-to-peer networks. *Proceedings of the 2002 Conference on Applications, Technologies, Architectures and Protocols for Computer Communications*, Aug. 19-23, ACM Press, New York, USA, pp: 177-190.

Deosarkar, B.P., N.S. Yadav and R.P. Yadav, 2008. Clusterhead selection in clustering algorithms for wireless sensor networks: A survey. *Proceedings of the International Conference on Computing Communication and Networking*, Dec. 18-20, Karur, pp: 1-8.

Ergen, S.C. and P. Varaiya, 2005. On multi-hop routing for energy efficiency. *IEEE. Commun. Lett.*, 9: 880-881.

Heinzelman, W.R., A. Chandrakasan and H. Balakrishnan, 2000. Energy-efficient communication protocol for wireless microsensor networks. *Proceedings of the 33rd Annual Hawaii International Conference on System Sciences*, January 4-7, 2000, Maui, HI., USA., pp: 1-10.

Lukachan, G. and M.A. Labrador, 2004. Selar: Scalable energy-efficient location aided routing protocol for wireless sensor networks. *Proceedings of the 29th Annual IEEE International Conference on Local Computer Networks*, November 16-18, 2004, IEEE, Tampa, Florida, ISBN:0-7695-2260-2, pp: 694-695.

Lv, Q.P. Cao, E. Cohen, K. Li and S. Shenker, 2002. Search and replication in unstructured peer-to-peer networks. *Proceeding of the 2002 International Conference on Supercomputing (ICS)*, June 22-26, 2002, ACM, New York, USA., pp: 84-95.

Mishra, S., S.M. Satpathy and A. Mishra, 2011. Energy efficiency in ad hoc networks. *Intl. J.Adhoc Sens. Ubiquitous Comput.*, 2: 139-145.

- Sasikala, M.S., M. Phil. and A. Nithya, 2014. Clustering in wireless sensor networks: A survey 1M. *Intl. J. Comput. Trends Technol.*, 17: 112-116.
- Singh, S.K., M.P. Singh and D.K. Singh, 2010. Energy efficient homogenous clustering algorithm for wireless sensor networks. *Int. J. Wireless Mobile Networks*, 2: 49-61.
- Xue, Q. and A. Ganz, 2004. Maximizing sensor network lifetime: Analysis and design guidelines. *Proceedings of the 2004 IEEE Conference on Military Communications, (MILCOM'04) Vol. 2, October 31-November 3, 2004, IEEE, Monterey, California, ISBN:0-7803-8847-X, pp: 1144-1150.*