

Flood Hazard Mapping Using Geographic Information Systems (GIS) in the Walanae River Basin Wajo Regency of South Sulawesi Province

¹Mukhsan Putra Hatta, ²Sugianto Badaruddin, ²Zulvyah Faisal and ²Devi Ayu Puspita

¹Department of Civil Engineering, Hasanuddin University, Makassar, Indonesia

²Department of Civil Engineering, Politeknik Negeri Ujung Pandang, Makassar, Indonesia

Key words: GIS, map, ArcGIS 10.1, flood volume, topographic data, Pammanua district

Corresponding Author:

Mukhsan Putra Hatta

Department of Civil Engineering, Hasanuddin University, Makassar, Indonesia

Page No.: 2802-2810

Volume: 15, Issue 14, 2020

ISSN: 1816-949x

Journal of Engineering and Applied Sciences

Copy Right: Medwell Publications

Abstract: Mapping flood-prone areas is one way to control floods in a non-structural way. The area around the Walanae river in Wajo district experiences flood every year and gets the biggest impact from the flood event. This study aims to map flood-prone areas and flood risks according to the area that gets the greatest impact. Analysis of flood-prone areas in this study uses the application of Geographic Information Systems (GIS) with three parameters, namely topographic data, flood volume DEM. The analysis was performed using the scoring and weighting methods. Geographic Information System is used as a spatial model in mapping flood potential using the overlay/intersect technique in ArcGIS10.1 and represent it in the form of a map based on the three parameters used. In this study, a high hazard class value of 8.21% was obtained for Pammana district, 7.49% for Sabbang Paru district and 7.68% for Tempe district.

INTRODUCTION

Floods usually occur in areas that have lower topography (basins) with high levels of regional rainfall^[1,2]. In addition, the occurrence of flooding can be caused by overflow of runoff and the volume exceeds the capacity of the drainage system or river flow system^[3]. According to Marchi *et al.*^[4], typical land characteristics that have the potential to experience flooding can provide information about a flood hazard condition related to geomorphological and hydrological characteristics in the area (i.e., frequency, area and length of inundation, maybe even the source of the cause). Thus, it can be assumed that geomorphological and hydrological surveys on

alluvial plains, flood plains and other lowlands can be used to estimate the historical development of the area in relation to flood events^[5].

Making maps to determine flood risk areas based on Geographic Information Systems^[6-8] is needed as a step in reducing the impact caused by floods^[9]. To compile a flood hazard and inundation maps, it is necessary to quantify the amount of flood and inundation which covers the area and also height and duration of inundation which are represented in the form of maps^[10-12]. This mapping of flood and inundation-prone areas would be better if it could be overlaid with river hydrological network maps and topographic maps because areas that have the potential to experience

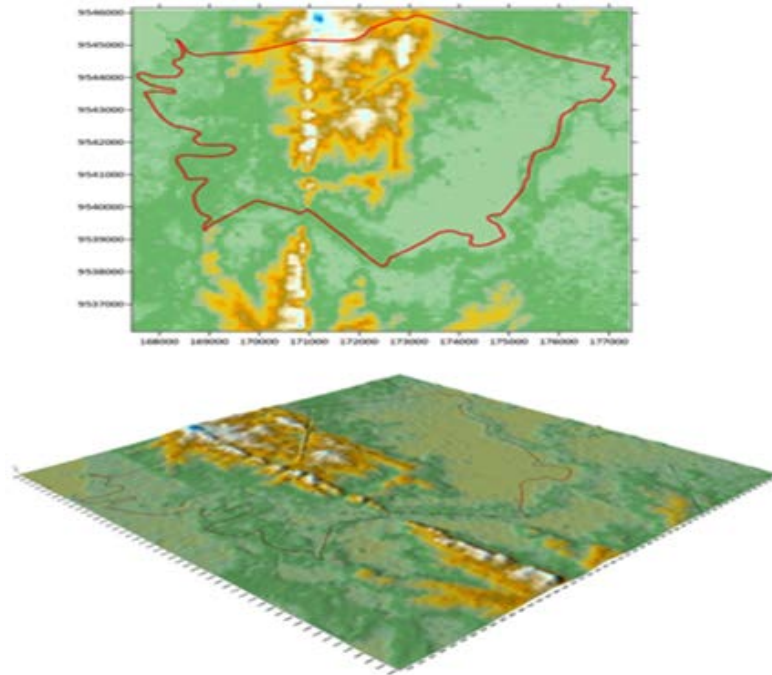


Fig. 2: Coverage area of resaerch observation in Wajo regency

Each parameter is weighted based on the amount of risk arising from the spatial flood event. To give weight to several parameters, the value of the interval class must be known. The equation used to create interval classes is the Sturgess equation by Andriyani:

$$K_i = (X_t - X_r) / k$$

Where:

- K_i = Interval class
- X_t = The highest value
- X_r = The lowest value
- k = Number of classes

The level of flood hazard indicates the level of threat in an area where there are community activities that can result in a loss between the Hazard component (H) and Vulnerability (V). The overlay process for all flood risk parameters uses the following equation:

$$\text{Risk} = (\text{Hazards} \times \text{Vulnerability}) / \text{capacity}$$

The level of risk is assessed spatially to produce a risk map. The weight of each component is 0.5. scores for each component class (hazard and vulnerability) are 0.33 (low), 0.67 (moderate) and 1 (high). Risk classes are classified by the equal interval method into three classes, namely low, medium and high.

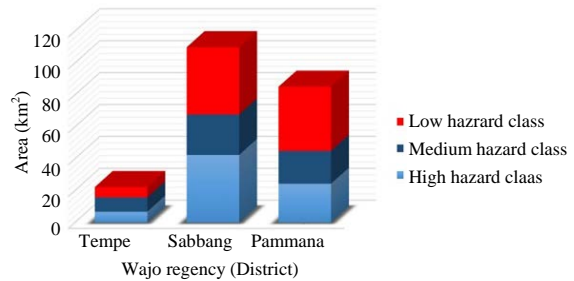


Fig. 3: The area of each flood hazard class based on village administration map in Wajo regency

RESULTS AND DISCUSSION

At Wajo regency in Walanae river region, the largest flood event ever occurred between a depth 1.5-3-5 and an inundation area of 21.698 ha (Fig. 3). Flood locations are spread across three districts including district of Tempe, Sabbang Paru and Pammana. As it is known that these areas are traversed by Walanae river. The results can be seen in Fig. 3. The impact of flood losses is presented in Table 1 and the area of the flood that affected by flood hazard class is presented in Fig. 4.

Furthermore, a flood hazard map is made which is the result of an overlay between a map of the earth and a map of the satellite imagery shown in Fig. 5 as well as a map of the topographic measurements as shown in Fig. 6.

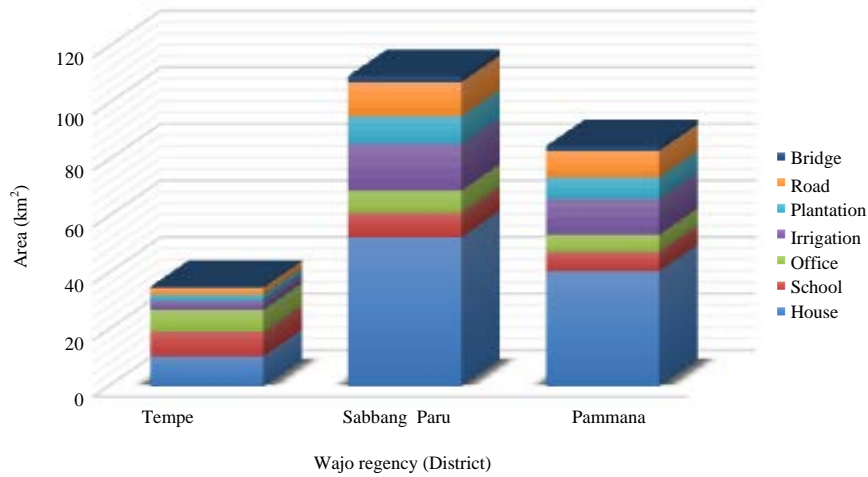


Fig. 4: The area of each flood hazard class based on infrastructure and facilities affected by the flood

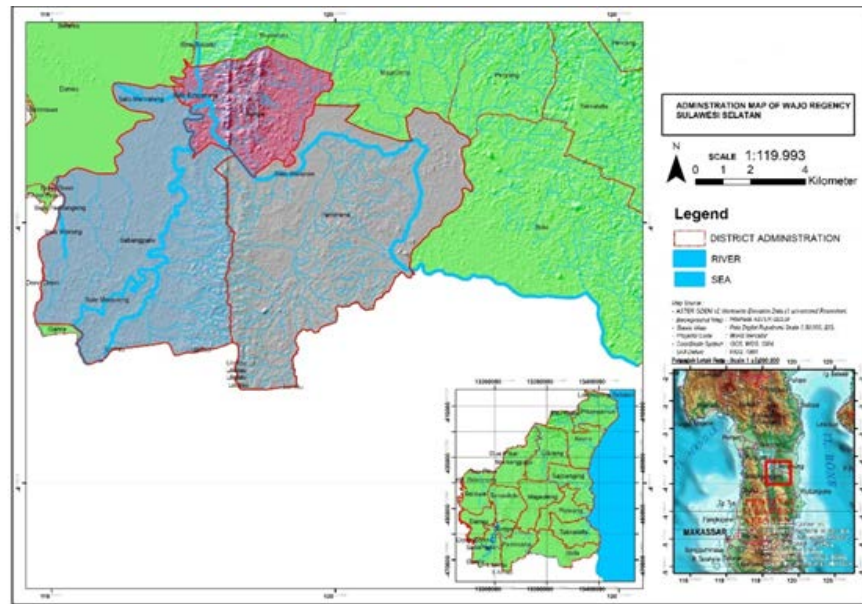


Fig. 5: Administrative map for Walanae river, Wajo regency

Table 1: The impact of flood losses

Variables	Area (km ²) (District)		
	Tempe	Sabbang Paru	Pammana
House	10.63	52.70	40.82
School	8.78	8.78	6.80
Office	7.69	7.69	5.95
Irrigation	3.32	16.47	12.76
Plantation	1.99	9.88	7.65
Road	2.44	12.08	9.36
Bridge	0.44	2.20	1.70

With reference to the highest flood events that have ever occurred from surveys and inventories an analysis of

flood events for the affected area and from the affected facilities and infrastructure resulted in a flood hazard map shown in Fig. 7.

For Tempe district there are 10 affected villages namely, Tempe village, Watallipue, Teddaopu, Lapongkoda, Padduppa, Manddukelleng, Sitampae, Wiringpolennae, Siengkangand Salomenraleng. Administratively, the high hazard class dominates in Tempe district, namely in the village of Tempe (1.700 ha or 7.68% of total area of hazard area), Watalippue (1.100 ha or 4.497%), Teddaopu (82 ha or 3.97%) and Salomenrang (285 ha or 12.78%).

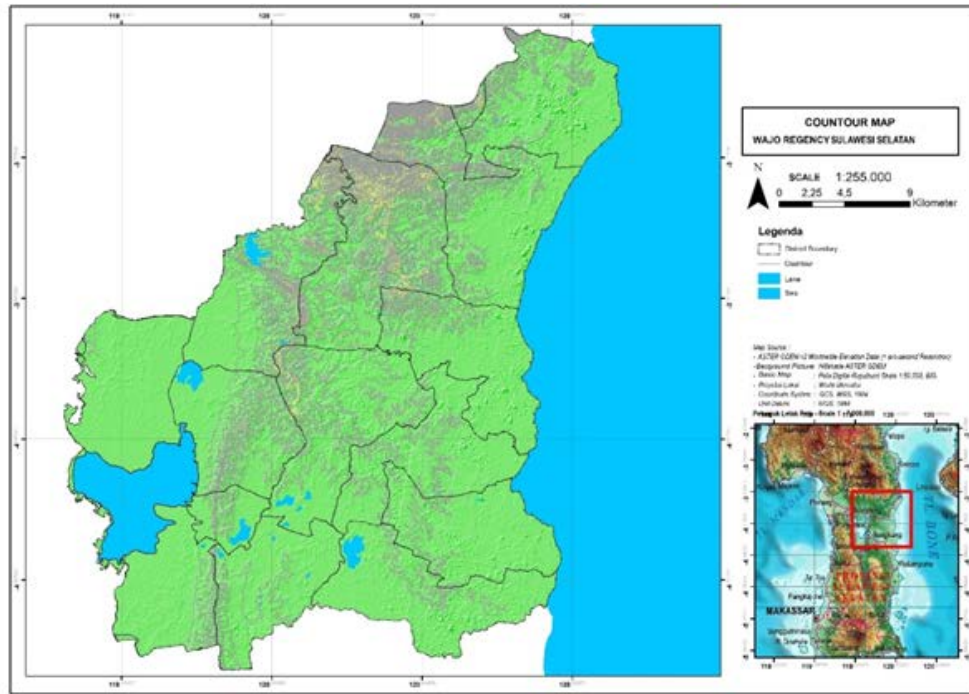


Fig. 6: Contour map of Wajo regency

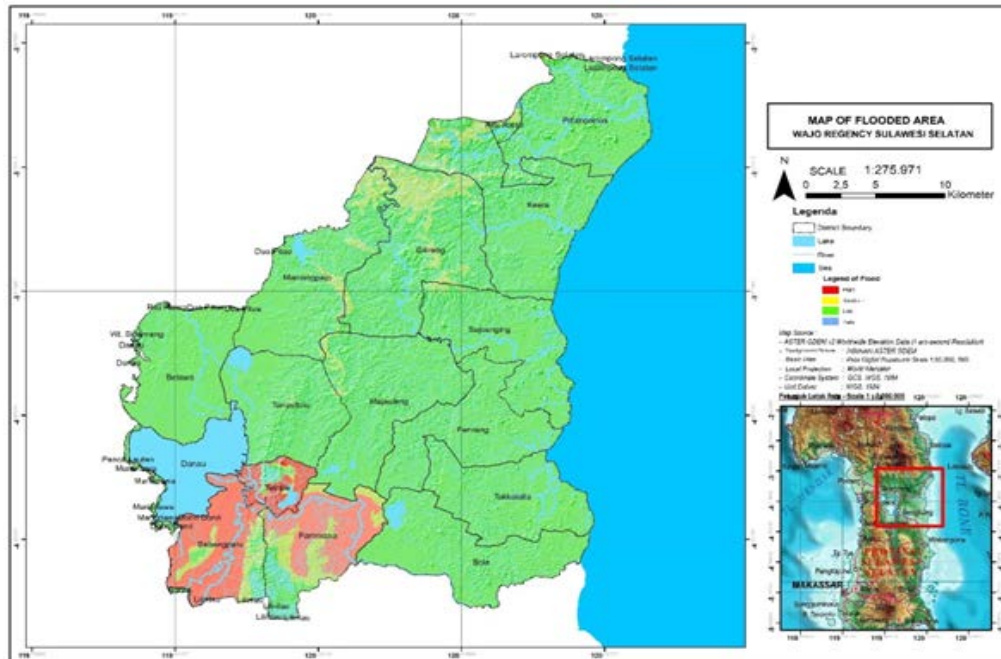


Fig. 7: Map of the flooded area in Wajo regency

Moderate class is in village of Lapongkoda (91 ha or 4.11% of total area of hazard area), paduppa (160 ha or 7023%), Mandudukelleng (418 ha or 18.88%) and Sitampae (233 ha or 12.87%). Low class dominates in

these regions, namely Village Wiringpolennae and salomenrang with total 511 ha and 154 ha respectively. As it is shown on Fig. 8 for Prone-flood map and facilities and infrastructures affected as shown on Fig. 9.

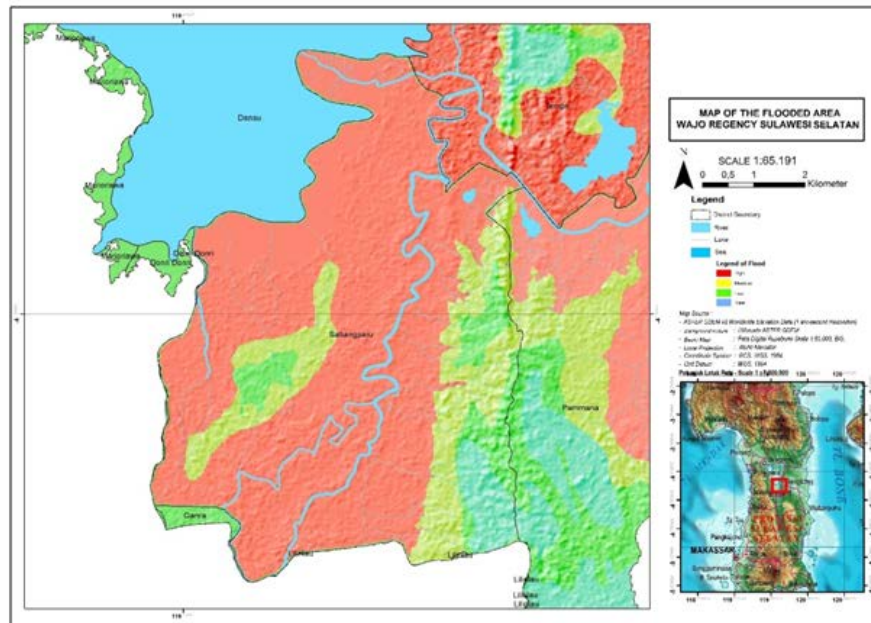


Fig. 10: Map of the flooded area of Sabbang Paru district in Wajo regency

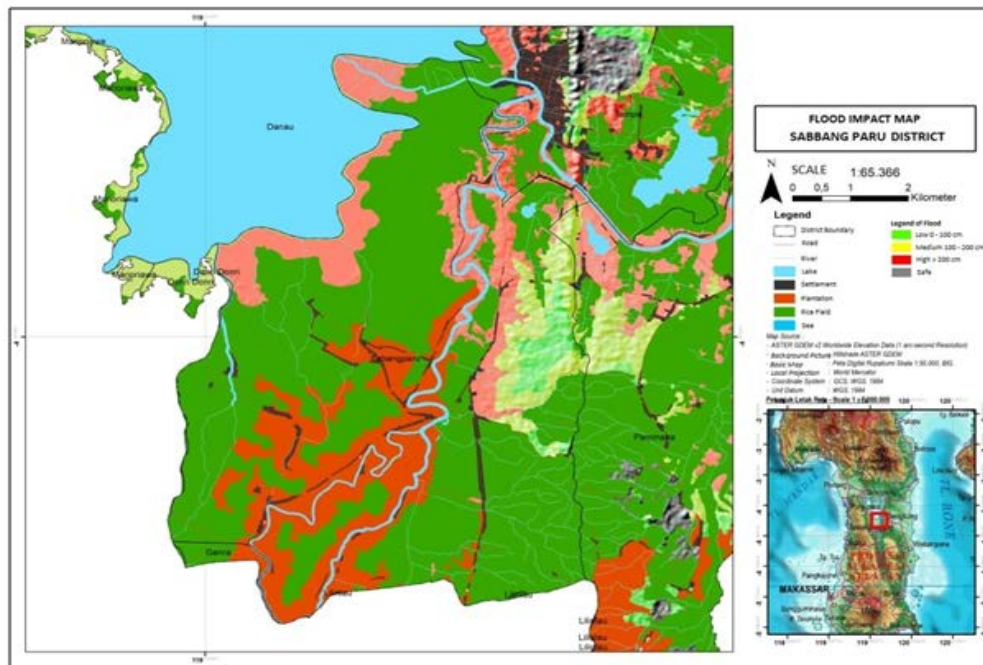


Fig. 11: Flood impact map of Sabbang Paru district

For Pammana district, there are 8 affected villages namely: Lempa village, Lagosi, Lapaukke, Abbanuangnge, China, Tadang Pale, Watamanre and dan Pallawurka. For Pammana district, the high hazard is spread ini Lempa village (698 ha or 8.21%), Lagosi

(1.497 ha or 17.60%), Lapaukke (1.230 ha or 14.46%) and Abbanuangnge (600 ha or 7.05%). Moderate class is Tadang Pale village (1.271 ha or 14.94%) amd Watamanre (786 ha or 9.24%). Low class is China village (1.663 ha or 19.55%) and Pallawarukka (760 ha

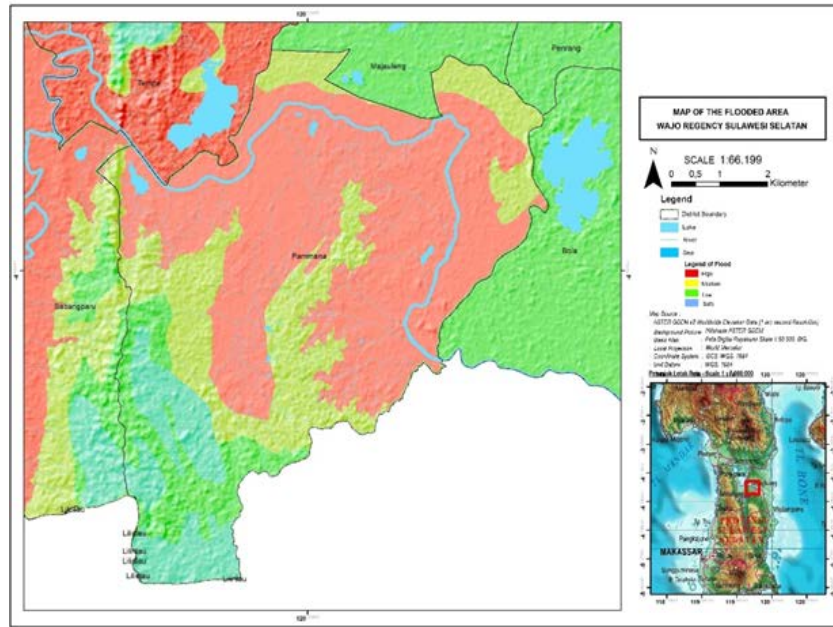


Fig. 12: Map of the flooded area of Pammana district in Wajo regency

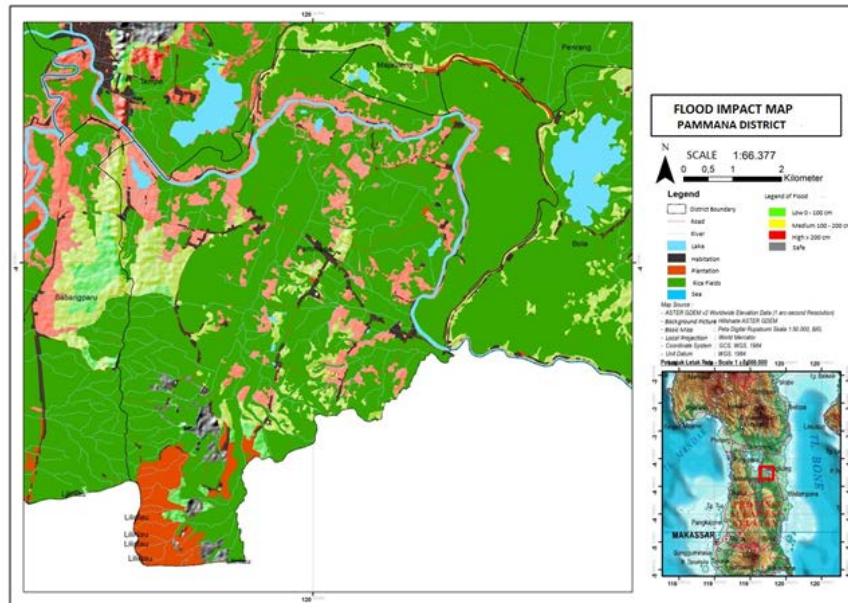


Fig. 13: Flood impact map in Pammana district

or 8.94%). It is shown on Fig. 12 for prone-flood map and facilities and infrastructures affected as shown in Fig. 13 in Pammana district.

CONCLUSION

Based on the results obtained from this study, it can be concluded that Wajo regency in Walana river region

has three levels of flood hazard namely, the high hazard class, moderate class and low class which are spread across three districts namely; Tempe, Sabbang Paru and Pammana. The largest flood event ever occurred between a depth 1.5-3.5 m and an inundation area of 216.98 km². Total area for the high hazard class in Pammana district is 40.25 km², Sabbang Paru is 42.14 Km² and Tempe is 6.47 km².

ACKNOWLEDGEMENTS

We would like to thank the Anonymous reviewers for their constructive suggestions. We also thank the Head of Civil Engineering Department University Hasanuddin and Politeknik Negeri Ujung Pandang for supporting and providing an opportunity to conduct this research.

REFERENCES

01. Kourgialas, N.N. and G.P. Karatzas, 2011. Flood management and a GIS modelling method to assess flood-hazard areas-a case study. *Hydrol. Sci. J.*, 56: 212-225.
02. Neal, J., C. Keef, P. Bates, K. Beven and D. Leedal, 2012. Probabilistic flood risk mapping including spatial dependence. *Hydrol. Processes*, 27: 1349-1363.
03. Bates, P.D and A.P.J. Deroo, 2000. A simple raster-based model for flood plain inundation. *J. Hydrol.*, 236: 54-77.
04. Marchi, L., M. Borga, E. Preciso and E. Gaume, 2010. Characterisation of selected extreme flash floods in Europe and implications for flood risk management. *J. Hydrol.*, 394: 118-133.
05. Abuzied, S., M. Yuan, S. Ibrahim, M. Kaiser and T. Saleem, 2016. Geospatial risk assessment of flash floods in Nuweiba area, Egypt. *J. Arid Environ.*, 133: 54-72.
06. Correia, F.N., F.C. Rego, M.D.G. Saraiva and I. Ramos, 1998. Coupling GIS with hydrologic and hydraulic flood modelling. *Water Resources Manage.*, 12: 229-249.
07. Cunha, N.S., M.R. Magalhaes, T. Domingos, M.M. Abreu and C. Kupfer, 2017. The land morphology approach to flood risk mapping: An application to Portugal. *J. Environ. Manage.*, 193: 172-187.
08. Nganro, S., S. Trisutomo, R.A. Barkey and M. Ali, 2020. Rainfall analysis of the Makassar city using Thiessen polygon method based on GIS. *J. Eng. Appl. Sci.*, 15: 1426-1430.
09. Pradhan, B., 2009. Flood Susceptible mapping and risk area delineation using logistic regression, GIS and remote sensing. *J. Spatial Hydrol.*, 9: 1-18.
10. Carrara, A., F. Guzzetti, M. Cardinali and P. Reichenbach, 1999. Use of GIS technology in the prediction and monitoring of landslide hazard. *Nat. Hazards*, 20: 117-135.
11. Clark, M.J., 1998. Putting water in its place: A perspective on GIS in hydrology and water management. *Hydrol. Processes*, 12: 823-834.
12. Colby, J.D., K.A. Mulcahy and Y. Wang, 2010. Modeling flooding extent from hurricane Floyd in the coastal plains of North Carolina. *Environ. Hazards*, 2: 157-168.
13. Zenger, A. and S. Wealands, 2004. Beyond modelling: Linking models with GIS for flood risk management. *Natural Hazards*, 33: 191-208.
14. Ozdemir, H. and D. Bird, 2009. Evaluation of morphometric parameters of drainage networks derived from topographic maps and DEM in point of floods. *Environ. Geol.*, 56: 1405-1415.
15. Townsend, P.A. and S.J. Walsh, 1998. Modeling floodplain inundation using an integrated GIS with Radar and optical remote sensing. *Geomorphology*, 21: 295-312.
16. Ouma, Y. and R. Tateishi, 2014. Urban flood vulnerability and risk mapping using integrated multi-parametric AHP and GIS: Methodological overview and case study assessment. *Water*, 6: 1515-1545.