

Solvomagnetic Crystallization of Co^{2+} and Mn^{2+} Chloride under Magnetic Field and Analization of Field Effect

¹H. Arabshahi, ²M. Hakimi and ²R. Rezaee

¹Department of Physics, Ferdowsi University of Mashhad, Mashhad, Iran

²Department of Chemistry, Payame Noor University of Mashhad, Mashhad, Iran

Abstract: Solvomagnetic method is a famous method to get pure crystals of organic or inorganic compounds. In this method with applying a certain strong magnetic field new pure crystal structures can be prepared from original samples. The result will be useful for further complete analysis. In this research some new transition metals salts crystals have been produced by using solvomagnetic this method and their crystal structures have been determined using X-ray diffraction pattern and melting point has also been measured.

Key words: Solvomagnetic, pure crystals, magnetic field, X-ray diffraction, magnetic technology, Iran

INTRODUCTION

The magnetic technology has been cited in the literature and investigated since the turn of the 19th century when Lodestones and naturally occurring magnetic mineral formations were used to decrease the formation of scale in cooking and laundry applications. Today, advances in magnetic and electrostatic scale control technologies have led to their becoming reliable energy savers in certain applications (Lin and Yotvat, 1990; Welder and Partridge, 1954).

For example, magnetic or electrostatic scale control technologies can be used as a replacement for most water-softening equipment. Specifically, chemical softening (lime or lime-soda softening), ion exchange and reverse osmosis when used for the control of hardness could potentially be replaced by non-chemical waterconditioning technology.

This would include applications both to cooling water treatment and boiler water treatment in once-through and recirculating systems (Szkutula *et al.*, 2002). The general operating principle for the magnetic technology is a result of the physics of interaction between a magnetic field and a moving electric charge in this case in the form of an ion.

When ions pass through the magnetic field a force is exerted on each ion. The forces on ions of opposite charges are in opposite directions. The redirection of the particles tends to increase the frequency with which ions of opposite charge collide and combine to form a mineral precipitate or insoluble compound.

Since this reaction takes place in a low-temperature region of a heat exchange system the scale formed is non-

adherent. At the prevailing temperature conditions, this form is preferred over the adherent form which attaches to heat exchange surfaces. The operating principles for the electrostatic units are much different. Instead of causing the dissolved ions to come together and form non-adherent scale, a surface charge is imposed on the ions so that they repel instead of attract each other.

Thus the two ions (positive and negative or cations and anions, respectively) of a kind needed to form scale are never able to come close enough together to initiate the scale-forming reaction. The end result for a user is the same with either technology; scale formation on heat exchange surfaces is greatly reduced or eliminated (Pilipenko, 1991; Donaldson, 1990; Strum and Morgan, 1940; Coey and Cass, 2000).

As we know many technique are being used for characterization of a compound in chemistry like IR, NMR, mass spectroscopy and UV methods. A complete characterization are not possible with either of them. Actually the only method that gives us a lot of information such as exact structure, spherical orientation and bond lengths is XRD.

But for using this method a pure crystal form of the compound is needed. Suitable crystal dimension for using in this method must be 0.5-45 mm. There are many ways for getting a suitable crystal of synthesized compound but choosing the right method is depended to some factors like oxidation state, water absorption and soon. One of the important stages in crystallizing is choosing a suitable solvent and also purity of the synthesized compound.

One of the most common methods of crystallization is crystallization with slow evaporation of solvent. The

best solvent in this method would be a solvent with high solubility toward compound and low boiling point like ethanol, acetonitril and dichloromethane.

MATERIALS AND METHODS

First of all 2.5 g cobalt chloride was weighted and also 1.2 g of chloride manganese and separately each one of them was solved in water and heated to 80 degree. Saturated solution was left to be cooled slowly. Crystalline formed in the bottom of the solution was collected and kept under dry and low temperature.

Similar to this method another solution was prepared and left to be cooled slowly but this time under a magnetic field of about 0.18 T.

It is shown that the solvomagnetic crystalline formed was collected. The both powdered sample were analyzed by XRD and comparison was performed between spectrums.

RESULTS AND DISCUSSION

The spectrums are clearly different to each other and this shows the effectiveness of the magnetic field on the structure of the formed crystals in the presence of magnetic field.

From the comparison between the spectrum Fig. 1 and 2 can be shown that CoCl_2 sample in the presence of the magnetic field has an increased intensive diffraction rather than CoCl_2 sample in the absence of the magnetic field. This is because of movement and compression of the Co^{+2} ions in the crystalline form under the effect of magnetic field.

Also a comparison between the spectrum Fig. 3 and 4 it can be shown that MnCl_2 sample in the presence of the magnetic field has an increased intensive diffraction rather than MnCl_2 sample in the absence of the magnetic field which is due to the movement and compression of the Mn^{+2} in the crystalline form under the effect of magnetic field.

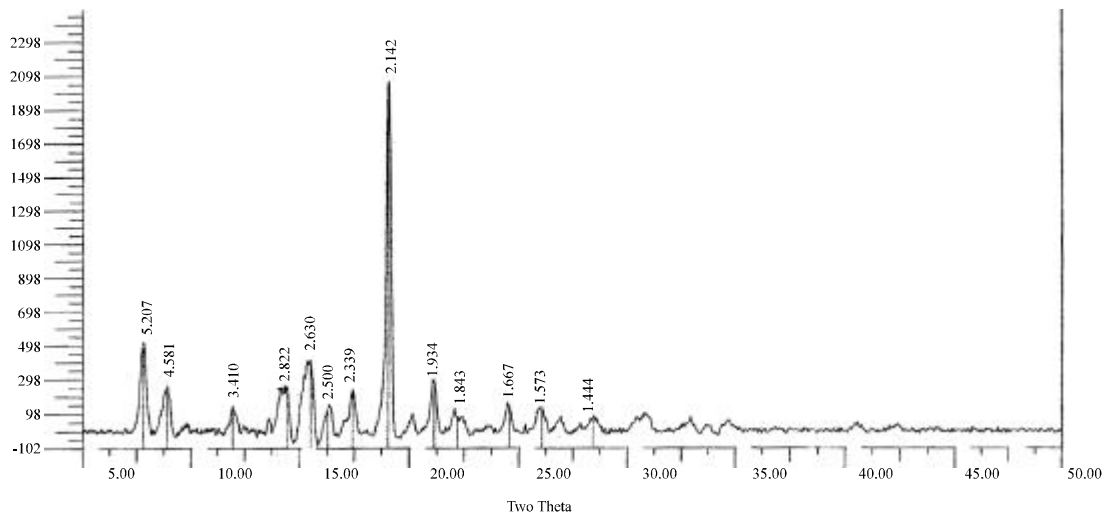


Fig. 1: The XRD diffraction patterns of CoCl_2 in the present of applied magnetic field

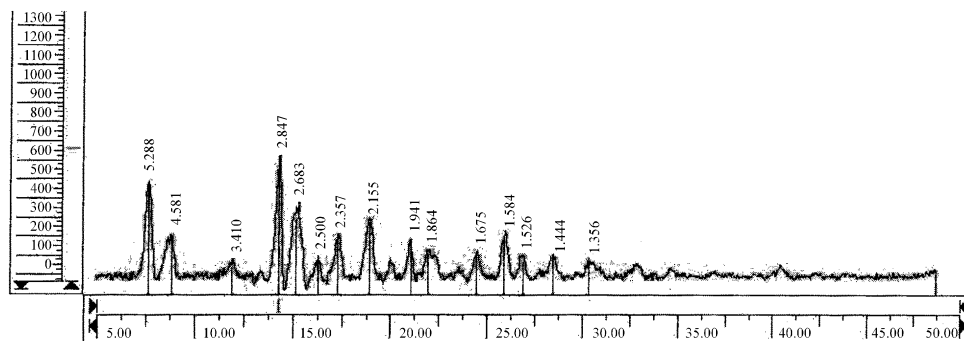


Fig. 2: The XRD diffraction patterns of CoCl_2 in the absent of applied magnetic field

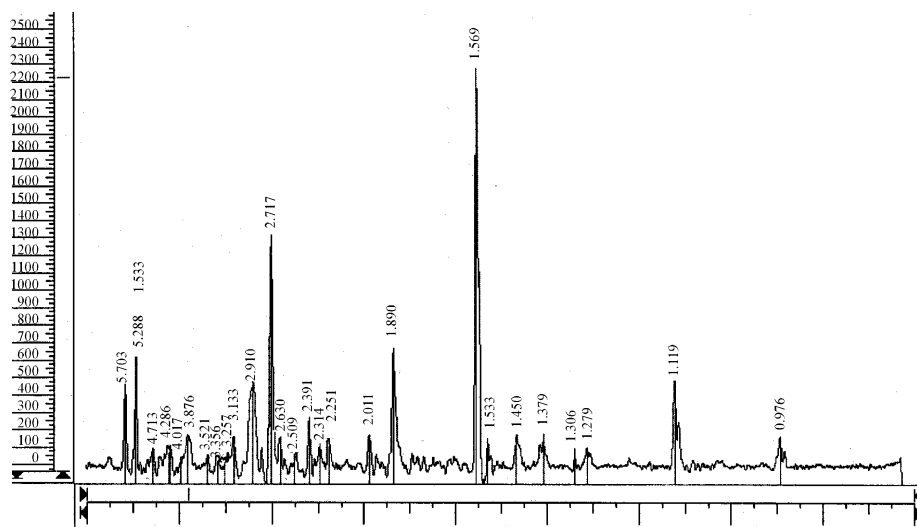


Fig. 3: The XRD diffraction patterns of $MnCl_2$ in the present of applied magnetic field

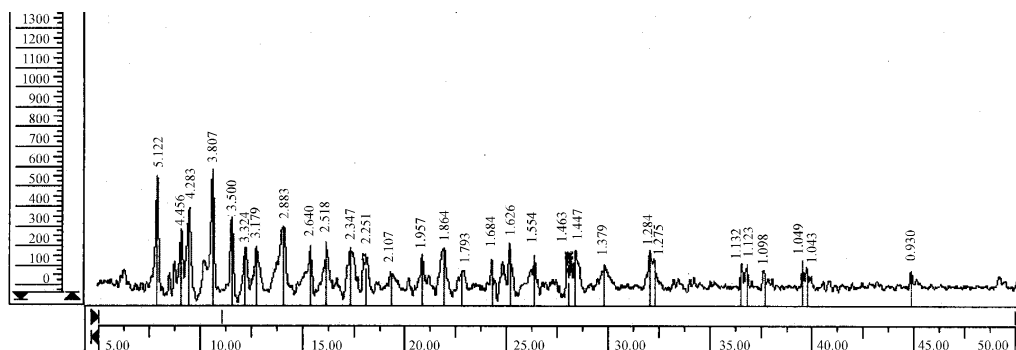


Fig. 4: The XRD diffraction patterns of $MnCl_2$ in the absent of applied magnetic field

CONCLUSION

Based on these studies, it was clarified that magnetic water does change the crystal structures properties of $CoCl_2$ and $MnCl_2$.

ACKNOWLEDGEMENT

We would like to thank Maryam Gholvani for writing up the manuscript.

REFERENCES

- Coey, J.M.D. and S. Cass, 2000. Magnetic water treatment. *J. Magnetism Magn. Mater.*, 209: 71-74.
 Donaldson, 1990. Scaling down the water problem. *Chemistry in Britain*, pp: 209.

- Lin, I.J. and J. Yotvat, 1990. Exposure of irrigation and drinking water to a magnetic field with controlled power and direction. *J. Magnetism Magn. Mater.*, 83: 525-526.
 Pilipenko, A.T., 1991. Methods of scale prevention in desalination of saline waters. *Khimiyai. Tekhnologiya Vody*, 13: 996-996.
 Strum, W. and J.P. Morgan, 1940. *Aquatic Chemistry*. Wiley-Interscience, New York.
 Szkatula, A., M. Balanda and M. Kopec, 2002. Magnetic treatment of industrial water. *Eur. Phys. J. Applied*, 18: 41-49.
 Welder, B.Q. and E.P. Partridge, 1954. Practical performance of water-conditioning gadgets. *Ind. Eng. Chem.*, 46: 954-960.